# U.S. DEPARTMENT OF THE INTERIOR U.S. GEOLOGICAL SURVEY

### THE SOUTHERN CALIFORNIA NETWORK BULLETIN JANUARY - DECEMBER 1991

by
Lisa A. Wald<sup>1</sup>
L. Katherine Hutton<sup>2</sup>
Lucile L. Jones<sup>1</sup>
Douglas D. Given<sup>1</sup>
Katrin Douglass<sup>2</sup>
Jim Mori<sup>1</sup>
Egill Hauksson<sup>2</sup>
and
Hiroo Kanamori<sup>2</sup>

Open-File Report 92-335

This report is preliminary and has not been reviewed for conformity with U.S. Geological Survey editorial standards or with the North American Stratigraphic Code. Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

<sup>1</sup>U.S. Geological Survey 525 S. Wilson Avenue Pasadena, CA 91106 <sup>2</sup>Seismological Lab California Institute of Technology Pasadena, CA 91125

## Team of researchers, data analysts, engineers, and assistants involved in the operation of:

## SOUTHERN CALIFORNIA SEISMIC NETWORK SCEC DATA CENTER TERRASCOPE CUBE

### USGS

Armando Burciaga
Bob Cone
Gary Cone
Bill Curtis
Linda Curtis
Bob Dollar
Donna Eberhart-Philips
Doug Given
Tom Heaton
Sue Hough
Lorraine Hwang
Donna Jenkins
Lucy Jones
Chuck Koesterer

Scott Lydeen

Jim Mori

Sue Perry Lisa Wald

### Caltech

Steve Bryant Rob Clayton Art Dejohn Katrin Douglass Janet Fernandes Ann Freeman Riley Geary Egill Hauksson Kate Hutton Dave Johnson Hiroo Kanamori Rosemary Miller Wayne Miller Dee Page Helen Qian Paul Roberts Bob Taylor Kathy Watts Sue Yamada

## **Errata**

The following are corrections to the 1990 Network Bulletin, Open-File Report 91-255 (Wald et al., 1990):

- 1) The rest of the sentence on p.4 is: "All of the data in the figure were converted to ground velocity using the instrument constants listed in the article entitled TERRAscope Broad-Band Stations."
- 2) The VBB value in Table 3 is a generic value based on the average of all instruments rather than the measured value which has some dependance on the generator constant, except for the PAS station which has measured values.
- 3) In Table 3, the LG component for station SVD is recorded at 80 samples/sec as stated in the preceding paragraph, not at 100 samples/sec.
- 4) In Table 3, the LG value for SVD was incorrectly determined. The correct value should be 2.14\*106 counts/m/sec<sup>2</sup> from installation to 8/26/91, and 2.14\*109 counts/m/sec<sup>2</sup> from 8/26/91 to present, and...
  - 5) In Table 3, ULP values have been added for all the stations.

A current corrected table to replace Table 3 from the 1990 Network Bulletin is found below.

	Tab	le 3. Bro	ad-Band [	Data Strea	ams	
Station	LG 100sps	<u>VSP</u> 80sps	<u>VBB</u> 20sps	LP 1sps	VLP 0.1sps	<u>ULP</u> 0.01sps
GSC	3330		9.88x10 <sup>8</sup>	3.95x10 <sup>9</sup>	1.58x10 <sup>10</sup>	6.32x10 <sup>10</sup>
ISA	3330		9.88x10 <sup>8</sup>	3.95x10 <sup>9</sup>	1.58x10 <sup>10</sup>	6.32x10 <sup>10</sup>
PAS	3738		1.04x10 <sup>9</sup>	4.16x10 <sup>9</sup>	1.66x10 <sup>10</sup>	6.64x10 <sup>10</sup>
PFO	3330		9.88×108	3.95x10 <sup>9</sup>	1.58x10 <sup>10</sup>	6.32x10 <sup>10</sup>
SBC	3330		9.88×10 <sup>8</sup>	3.95x10 <sup>9</sup>	1.58x10 <sup>10</sup>	6.32x10 <sup>10</sup>
SVD	2.14x10 <sup>5</sup> (80sps)	5.99x10 <sup>8</sup>	5.99x10 <sup>8</sup>	5.99x10 <sup>8</sup>	2.39x10 <sup>9</sup>	2.39x10 <sup>9</sup>

LG value is counts/m/sec<sup>2</sup>. All others are counts/m/sec.

## **Table Of Contents**

INTRODUCTION3	
NETWORK CONFIGURATION3	
Station Codes3	
New Stations	
ARB	
AZU4	
BC34	
CFL	
GAV	
VET4	
WRV4	
Discontinued Stations5	
Phasing-out of Caltech Photographic Stations5	
NETWORK OPERATIONS	
Status of Processing	
Southern California Network Computer	
Location of MEM Files	
SPIGOT8	
TIMIT8	
Southern California Earthquake Center8	
Southern Catrornia Earthquake Center	
Pasadena Office Expansion & Changes	
Strong-motion Instrumentation Program in Southern California9	
TERRAscope, Gopher, and CUBE Update	
RESEARCH NOTES	
The June 28, 1991 Sierra Madre Earthquake12	
Anomalous seismicity in the San Gabriel Valley; 1987-1991	
Radiated Energy Estimates	
Southern California Historical Magnitudes	
SYNOPSIS OF SEISMICITY18	
Imperial Valley	
South San Jacinto18	
South Elsinore18	
San Diego18	
Los Angeles	
North Elsinore18	
San Bernardino18	
North Mojave19	
South Sierra Nevada19	
Santa Barbara19	
REFERENCES	
REI ERENCES	
List of Tables	
List of Tables	
Table 1. New Stations4	
Table 2. Discontinued Stations	
Table 3. Caltech instruments recorded on photographic paper on site6	
Table 4. Processing Status of Network Data	
List of Appendices	
Appendix A. Significant Southern California Earthquakes	. 1
Appendix B. Strong-motion Accelerograph Stations in Southern California	2
Appendix C. Cumulative Index to Southern California Network Bulletins	. 3

## INTRODUCTION

The California Institute of Technology together with the Pasadena Office of the U.S. Geological Survey operates a network of approximately 300 remote seismometers in southern California. Signals from these sites are telemetered to the central processing site at the Caltech Seismological Laboratory in Pasadena. These signals are continuously monitored by computers that detect and record thousands of earthquakes each year. Phase arrival times for these events are picked by analysts and archived along with digital seismograms. All data acquisition, processing and archiving is achieved using the CUSP system. These data are used to compile the Southern California Catalog of Earthquakes, a list beginning in 1932 that currently contains more than 201,000 events. This data set is critical to the evaluation of earthquake hazards in California and to the advancement of geoscience as a whole.

This and previous Network Bulletins are intended to serve several purposes. The most important goal is to make Network data more accessible to current and potential users. It is also important to document the details of Network operation, because only with a full understanding of the process by which the data are produced can researchers use the data responsibly. In order to maximize the Bulletins' usefulness, a cumulative index of subjects that have appeared in this and earlier Bulletins appears in Appendix C.

## **NETWORK CONFIGURATION**

### Station Codes

On January 1, 1991 the Southern California Network operations began using a new station code. This code has been used for quite some time by the Northern California Network. The three letter code which describes the location of the station remains and is joined by a letter designating the agency which operates and maintains the station. This letter for the Southern California Network is "C". The one letter code describing the component has been replaced by a three letter code:

#### letter 1: Instrument

V -	short period
W -	Wood-Anderson
В-	broad-band
A -	accelerometer(FBA)
-	

L - long-period

letter 2: Gain

H - high
L - low
F - very low
S - strong-motion

letter 3: Orientation

Z - vertical N - north-south E - east-west

The conversion from the old codes to the new code is as follows:

## Computer Channels:

old V Z N		new VHZ VLZ VLN
E A B	0.2g	VLE AFZ AFN
C I J	2.0g	AFE ASZ ASN

K	ASE
1 2	BLZ BLN
3	RIF

### Helicorders and Photographics:

	U 1
old	new
Z	VHZ
photo Woo	d-Anderson
N	WLN
Е	WLE
100x photo	)
В	WFN
C	WFF

### TERRAscope Data:

(all new)	
BHZ	LHZ
BHN	LHN
BHE	LHE

#### **New Stations**

Several new sites have been added since publication of the last Network Bulletin. As in past Bulletins, reports of network changes are not restricted to those that occurred during the reporting period but are as current as possible. An explanation for the addition of each station is provided, followed by Table 1 which contains information about each station. An explanation of the conventions used for full station codes is found above. Figure 1 is a current station map.

#### <u>ARB</u>

A network portable station (Wald et al., 1991) was installed here after many small earthquakes occurred in the area.

#### AZU

The ARB network portable station was moved to this location immediately after the Sierra Madre earthquake in order to get close-in recordings of aftershocks.

## BC3

This site was renamed from BC2 when the location of the seismometer was moved.

### **CFL**

A 3-component FBA was added to this already-existing site.

### GAY

Two horizontal components were added to an already existing site.

### **YET**

A portable station at UPL was moved to this location immediately after the Sierra Madre earthquake to provide good recordings of the aftershocks.

## WRY

A network portable station was moved from VET to this site during a Coso swarm on February 21, 1992.

		Tab	ole 1. New S	Stations			
Code	Site Name	Lat.	Long.	Elev.	<u>Date</u> Installed	Instr.	Orient.
ARBC VHZ	Archibald Ranch	34° 13.23′ N (34.221°)	117° 36.32' W (117.605°)	221	04/02/91	L4	vertical
ARBC VLE	*1	"	H	0	11	11	East
ARBC ASZ			<b>#</b>	"	11	FBA	vertical
ARBC ASN			•	**	**	FBA	North
ARBC ASE	11			**	17	FBA	East
ARBC VLN	11		••	н	***	L4	North
ARBC VLZ	"		**	**	**	L4	vertical lo-gain
AZUC VHZ	Azusa	34° 13.23' N (34.221°)	117° 54.24′ W (117.904°)	1182	07/02/91	L4	vertical
AZUC VLE	•	(34.221 )	(11/1/04 )	•	•	L4	East
AZUC ASZ	u		**	••	11	FBA	vertical
AZUC ASN	**	н	*	••	TF.	FBA	North
AZUC ASIN	••			•	**	FBA	East
AZUC ASN	**	**		14	**	L4	North
AZUC VLZ	11		**	11	••	L4	vertical lo-gain
BC3C VHZ	Big Chuckawalla Mtns	33° 39.25' N (33.654°)	115° 27.25 'W (115.454°)	1098	05/08/91	L4	vertical
CFLC ASZ	Chilao Flat	34° 19.97' N (34.333°)	118° 1.38 W (118.023°)	1586	06/30/91	FBA	vertical
CFLC ASN	11	"	"	u	**	FBA	North
CFLC ASE	ı,		*	11	v	FBA	East
GAVC VLE	Glen Avon	34 ° 1.35' N 34.023 °)	117 ° 30.74'W (117.512 °)	186	04/04/91	L4	East
GAVC ASN	H	"	"	н	**	L4	North
VETC VHZ	Mount Vetter	34 ° 17.8'N (34.297°)	118 ° 2.2'W (118.037 °)	1788	07/01/91	L4	vertical
VETC VLE	**	(34.227 )	"	**	**	L4	East
VETC ASZ	**	**	**	**	**	FBA	vertical
VETC ASN	**	**	•	**	rr	FBA	North
	H	11	н	**	••	FBA	East
VETC VI N	40	**	n	Ħ	**	L4	North
VETC VLN	**		•	н	**	L4	vertical lo-gain
VETC VLZ WRVC VLE	Rose Valley	36 ° 0.47N	117 ° 53.42W	1066	02/21/92	L4	East
11 m 110 1 m 1	Canyon	(36.008°)	(117.890°)	***	н	FBA	North
WRVC ASN		"	.,	**	**	FBA	East
WRVC ASE	"			11	**	LA	North
WRVC VLN		"	···				110101

### **Discontinued Stations**

Ten stations have been removed since the last Bulletin was released. The removal dates are shown below. Station ARB was moved after the Sierra Madre earthquake to the AZU site. At the same time, the station at UPL was moved to the VET site, and PMC, PMCN, and PAD were replaced with the three-component CFL site. VET was discontinued to provide multiple components at the WRV site near a Coso swarm in February of 1992. These removals are summarized in Table 2.

Table 2. Discontinued Stations								
Station Code	Date Discontinued							
ARBC	07/02/91							
BC2C	05/08/91							
CLMC	04/02/91							
IRNC	10/20/91							
PADC	06/30/91							
PMCC	06/30/91							
SDWC	06/14/91							
SPMC	07/30/91							
UPLC	07/01/91							
VETC	02/21/92							

## Phasing-out of CaltechPhotographic Stations

Photographic recording is being discontinued as soon as possible for the following reasons:

- 1) Kresge has no more space for storage of paper records.
- 2) The new TERRAscope stations provide superior data.
- 3) Photographic paper is expensive and the funds are better used for support of other projects such as TERRAscope.
- 4) Personnel can be better utilized in other areas.

The immediate goal is to reduce the number of photographic records from 30 to 20 per day. In the next two years that number will decrease to zero. All these sites will be replaced with TERRAscope stations.

At remote sites Wood-Anderson instruments only will be kept running for, at most, two more years. Some records at PAS have been discontinued also.

Station	Instr.	Comp.	days/sheet	Discontinued
CWC	WLN	north	d/sheet	
	WLE	east	d/sheet	
	Benioff	vertical	d/sheet	
	1-90	vertical	d/sheet	
	SM (LG torsion)	vertical, north, east	7d/5 strips of film	
PLM	WLN	north	d/sheet	
	WLE	east	d/sheet	
	1-90	vertical	d/sheet	
	SM	vertical, north, east	7d/6 sheets	
RVR	WLN	north	d/sheet	
	WLE	east	d/sheet	
	1-90	vertical	d/sheet	
	1-90	north, east	d/sheet	
	SM	vertical, north, east	7d/5 strips of film	
SBC	WLN	north	d/sheet	
	WLE	east	d/sheet	
	SM	vertical, north, east	7d/5 strips of film	
TIN	WLN	north	d/sheet	
	WLE	east	d/sheet	
	Benioff	vertical	d/sheet	
	1-90	vertical	d/sheet	
	1-90	north, east	d/sheet	

TABLE 3. (continued) Caltech Instruments Recorded on Photographic Paper on Site Station GSC Instr. Comp. days/sheet Discontinued Sprengnether vertical 1 April 91 d/sheet Sprengnether north d/sheet 1 April 91 Sprengnether d/sheet 1 April 91 east PAS Benioff vertical d/sheet Benioff north, east d/sheet 30-90 vertical d/sheet 30-90 north d/sheet 30-90 east d/sheet 1-90 vertical d/sheet 1-90 north, east d/sheet WLN 2d/sheet north WLE 2d/sheet east Lp vertical 3d/sheet ULP/LG 7d/sheet north ULP/LG 7d/sheet east SM vertical, north, east 7d/3 sheets SM vertical, north, east 7d/3 sheets

## **NETWORK OPERATIONS**

## Status of Processing

The status of each month of the catalog data since the advent of digital recording is described in Table 5. Events for months marked preliminary (P) have been timed but have not yet run the gauntlet of quality checking, addition of helicorder amplitudes and rearchiving necessary to become final (F). For months marked "pinked" (PNK), larger events (~3.0) have only been timed crudely on a few stations and smaller events are absent. A period in 1980-1981 has actually been timed and digital seismograms are available, but the "pinked" version is still used for any purpose requiring good magnitudes or completeness for large earthquakes; some events and magnitudes are missing otherwise. An increased effort has been made in the last couple of years to finalize the backlog of incompletedata.

	Tat	ole 5.	Pro	ocess	sing :	Statu	s of	Netw	ork	Data		
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1932-		PF	RE-DIC	SITAL	RECO	RDING	3 - CO	MPLE:	TE FOI	R M≥3	3.0	
1974												
1975-					ALI	PREL	IMINA	RY				
1976												
1977	P	P	P	P	P	P	P	P	P	P	P	P
1978	F	F	F	F	F	F	F	F	F	F	F	F
1979	P	P	P	P	P	P	P	P	P	P	P	P
1980	PNK	PNK	PNK	PNK	PNK	PNK	PNK	PNK	PNK	PNK	PNK	PNK
1981	PNK	PNK	P	P	P	P	P	P	P	P	P	P
1982	P	P	P	P	P	P	P	P	P	P	P	P
1983	P	PNK	PNK	PNK	PNK	PNK	PNK	P	P	P	P	P
1984	F	F	F	F	F	F	F	F	F	F	F	F
1985	F	F	F	F	F	F	F	F	F	F	F	F
1986	F	F	F	F	F	F	F	F	F	F	F	F
1987	F	F	F	F	F	F	F	F	F	F	F	F
1988	F	F	F	F	F	F	F	F	F	F	F	F
1989	F	F	F	F	F	F	F	F	F	F	F	F
1990	F	F	F	F	F	F	F	F	F	F	F	F
1991	F	F	F	F	F	F	F	F	F	F	F	F
1992	P	P	P	P								

## Southern California Network Computer Upgrades

The old pair of VAX 11/750 computers that were used for research and off-line processing of SCSN earthquake data have been replaced. Network processing is now accomplished on a VAXcluster consisting of a VAX 4300 server and five VAXstation 3100/76 workstations. All these machines run under VMS v.5.4. This upgrade represents a 30-fold increase in CPU power. The whole cluster has about 8Gb of disk space.

The MicroVAX II backup on-line system has been upgraded to a VAX 3900 and is now the primary on-line data acquisition computer. The MicroVAX 3200 which previously functioned as the primary acquisition machine is now the backup system. These machines also participate in the VAX cluster.

This upgrade has removed some serious computer resource limitations that have contributed to processing delays and data loss in the past. The new equipment will also allow development of new, more sophisticated applications

in seismic data collection and processing, e.g. real-time location and notification, integration of "exotic" data streams, interaction with the SCEC data center mass storage jukebox.

For questions regarding an account on the new cluster please contact Doug Given at e-mail address zot@bombay.gps.caltech.edu or (818)405-7812.

### Location of .MEM Files

The .MEM files, the files that contain all the information about each earthquake recorded by the network, are now online on bombay. gps. caltech. edu and easily accessible. Their locations have recently been defined by a logical name so that the person interested in obtaining or accessing the .MEM files does not have to know where they are. The logical for each month is named as follows:

MEM1\$:[yrmth] for 1932-1990 MEM2\$:[yrmth] for 1991-present where "yr" is the year and "mth" is the month. For example, if you want to run MAKEPHAS to obtain phase data for March of 1990, you would first type:

**DEF CUSPIN MEM\$:[90MAR]** 

and then run MAKEPHAS.

## SPIGOT: USGS-Caltech SCSN Data Access

A SPIGOT account is now working on the new VAX cluster. It is a captive account which allows only a few functions. To use it, login as SPIGOT; there is no password. It will present the user with a menu describing the following functions:

MENU or ?this menu
CATREADsearch/extract catalog data
COPYcopy files
DIRlist directory
TYPE filename.typtype a file
KERMIT run kermit file transfer program
DELETE filename.typ;# delete files
PURGE filename.typpurge all but the latest file version #
STATUSlist status of catalog data by month
LOGOUTlogout (all files are deleted)

Files are deleted after three days. Four minutes of inactivity will result in a forced logout.

## TIMIT: A New Earthquake Location Program

Since early January 1992, we have been processing data using a new and improved version of CUSP from Menlo Park, thanks to Alan Walter, Sam Stewart, and Bob Dollar. The most visible changes involved were 1) a transfer of all off-line processing to a new VAX 4000, and 2) the switch to a program called TIMIT for our interactive phase picking and locations. TIMIT runs on a VAX workstation, which replaces the fifteen-year-old Tektronics 4014 "green screen" that we used to use,

There are advantages and disadvantages to TIMIT; one advantage is the speed. Part of the increase is inherent in the hardware; the rest is because each workstation has its own memory and CPU, and multiple users do not compete with each other for resources, except with I/O and network traffic. We recently timed and located 889 members of a swarm near Coso Junction, in the space of about 10 days. At no time did we write unprocessed events to tape because of disk space problems, and we were "caught up" twice for the Weekly Report during the swarm. As our long term readers will know, this is unprecedented. Normally, such a swarm would have produced a "data gap" and a "backlog" of at least several weeks.

Under the new processing scheme, newly recorded events are transferred from the on-line system to a "WARM" directory on the 4000, where they are p-picked automatically,

located, and assigned a duration magnitude within a few minutes. Based on the error statistics of the hypocenter solution, the events are then automatically transferred to either the proper monthly directory, where they are timed accurately later using TIMIT, or to directories called TROUBLE and NOPIX, whose names are self explanatory. This procedure ensures that the monthly directory is seldom more than about 20 minutes behind the times, and that most telemetry glitches and other "garbage" are directed elsewhere. Since multiple events within the same trigger are handled by the analyst using TIMIT, the monthly directory is never a complete catalog. It should be a representative one, however, and a continually improving one as the analysts routinely locate events. And it is definitely a more current one than we are used to having on hand.

## Southern California Earthquake Center / Data Center (SCECDC)

The SCECDC has been online since January of 1992. It consists of a mass storage device capable of holding 50 WORM (Write Once - Read Many times) platters hosted by a SUN SPARC2 workstation. Each platter holds approximately 6 gigabytes of data. In order to access the data stored by the SCECDC, the user must first get an account on the data center UNIX machine. You may request an account via telnet or rlogin, e.g.

telnet scec2.gps.caltech.edu username: addme (no password required)

rlogin scec2.gps.caltech.edu -l addme

Upon logging in as addrne, you will be asked a series of questions concerning user name, affiliation, phone number, and internet/bitnet address. Within a day you will be contacted regarding the status of your account, including information on how to access the various data sets.

### Types Of Data

The following types of data are currently stored by the SCECDC:

- 1) Southern California Seismic Network (SCSN) catalog listings from 1932 to the present.
- 2) Digital seismograms for local, regional and teleseismic events recorded by the SCSN from July 1983 through December 1991 and July 1981 through July 1982; NOTE: These files are currently standard-order 2-byte-integer files, i.e. in SUNsparc short binary format.
- 3) ASCII data files (compressed) containing event information associated with each digital seismogram; e.g. phase, epicentral location, magnitude, and coda information. NOTE: In order to read these data files, they must first be uncompressed. This is done as follows:

uncompress -c filename > /tmp/outputfile

example: uncompress -c 91sep.out.Z > /tmp/91sep.out

#### VMS Users

Digital seismograms, online at the SCECDC, are also readily available to VMS users. They can accessed by remote login to

bombay.gps.caltech.edu.

telnet (or ftp) bombay.gps.caltech.edu username: spigot (no password required)

A program called GETSEIS will appear as one of the options available to this account. This program will retrieve a seismogram from the data center mass storage device, byte swap the file from SUNsparc short to DECVAX short binary format order, and return a xcuspid.grm file into the SPIGOT directory. To use this program simply type:

GETSEIS CUSPID# e.g. GETSEIS 52035

where cuspid# is the number of the event you are interested in (obtained from a catalog listing or by using CATREAD).

To obtain more information regarding the SCECDC contact one of the following:

Katrin Douglass katrin@seismo.gps.caltech.edu (818)356-2106

or

Dr. Rob Clayton clay@seismo.gps.caltech.edu (818)356-6909

both at:

Seismological Laboratory, Mail Code 252-21 CALTECH Pasadena, CA 91125

## Pasadena Office Expansion & Changes

The Pasadena USGS Field Office underwent quite a few changes during 1991. In addition to the house at 525 S. Wilson Ave. which is leased from Caltech, we now occupy half of the house at 535 S. Wilson Ave. which is next door. The other half is occupied by the Southern California Earthquake Center. A portion of the ground floor is also occupied by personnel from the Branch of Engineering Seismology (see article below).

We also acquired the convenience (or the curse) of Voice

As a result of several factors, there is a new main office number. It is (818)405-7823. It will be answered by the secretary, Linda Rosenthal-Curtis, in most cases, or a message can be left on Voice Mail. All other phone numbers remain unchanged.

There are several new staff members, as well. Sue Perry is our new office manager. Lorraine Hwang is a two-year NRC post-doc. Sue Hough is a new scientist with the Branch of Engineering Seismology. Bob Dollar is a new computer programmer with the Branch of Seismology. And Arnold Acosta and Edna Anjal are two technicians from the Branch of Engineering Seismology Strong-Motion Program who transferred to our office from another location (see below).

## Strong-motion Instrumentation Program in Southern California

The southern California strong-motion network is a part of the USGS strong-motion program under the Branch of Engineering Seismology which includes nearly 900 instruments in the United States. The program operates out of headquarter facilities in Menlo Park and Fresno, and field offices in Las Vegas, Seattle, and most recently Pasadena.

The two technicians in the Pasadena Office operate and maintain a network of approximately 115 acceleration stations in the southern California area (see Appendix B and Figure 2); technicians stationed elsewhere are in charge of the remaining 18 stations in southern California. A significant part of the network includes instrumentation owned by other agencies, most notably the Corps of Engineers, Veterans Administration, and the Metropolitan Water District, each of which provides the financial support for the USGS operation of the individual networks.

Projects underway or in the planning stage include:

- 1) The San Bernardino ground motion array being installed between the San Andreas and San Jacinto faults on a range of soil conditions including those with a high liquefaction potential.
- 2) A liquefaction array to be located near San Bernardino that will include downhole pore pressure and acceleration sensors.
- 3) Wadsworth (Los Angeles) and Loma Linda VA Hospitals where obsolete sensors are to be replaced and the structural recording system expanded.
- 4) Newport Beach structural array relocation of sensors and upgrading of data transmission system.
- 5) Installation of WWVB receivers at selected ground stations.
- 6) Temporary retrieval of existing field instruments for overhaul and upgrading, some of which were installed as long as 20 years ago.

A summary of the strong-motion instrumentation in southern California follows:

Structural Program:

Extensive Instrumentation 10 buildings 2 dams 1 bridge

Moderate Instrumentation 10 buildings 11 dams

Minimal Instrumentation
19 structures (includes L.A. code buildings)

Ground Motion Program:

100 triaxial instrument stations 1 liquefaction array

## TERRAscope, Gopher, & CUBE Update

In 1985 the Seismological Laboratory of the California Institute of Technology decided to deploy several modern broadband seismographic stations in southern California. With seed funding from the James Irvine Foundation, the first modern, high quality seismographic station was installed in Pasadena (PAS) at the Kresge Laboratory in November 1987, just after the 1987 Whittier Narrows earthquake. This station is a joint project between Caltech, the University of Southern California, the USGS, and IRIS. The PAS station consists of a broadband Streckeisen STS-1 seismometer and Quanterra data logger with a 24 bit digitizer and a Kinemetrics FBA-23 strong-motion sensor. PAS is included in the IRIS open system of seismographic stations where anyone can access the data through a telephone dial-up modern.

In 1988, when Caltech received a grant from the L. K. Whittier Foundation, the name TERRAscope was adopted, and development of the new network began. The initial goal for TERRAscope was to install at least a dozen modern broadband (10 Hz to DC) and wide-dynamic range (nominally 200 db) seismographic stations with "real-time" data retrieval capability. The PAS station served as a prototype, and various calibrations and tests continue to be done at this station.

Analysis of the new high quality data recorded at PAS from numerous regional earthquakes, including the December 1988 (M<sub>L</sub>=4.9) Pasadena earthquake at an epicentral distance of 3 km, have demonstrated that the high quality broadband data are the cornerstone needed for significant advances in both regional seismology and studies of teleseisms. In particular, the broadband data recorded at PAS from the October 1989 (M<sub>S</sub>=7.1) Loma Prieta earthquake were easily available immediately after the event to determine the style of faulting and other seismological parameters of the earthquake. The encouraging results from our analysis of TERRAscope data so far have led us to modify our initial goal from a dozen stations to 20 stations in southern California.

#### Current Status

As of February 1991, six TERRAscope stations, Pasadena (PAS), Goldstone (GSC), Piñon Flats (PFO), Santa Barbara (SBC), Isabella (ISA), and Seven Oaks Dam (SVD), are in operation. The station PFO is operated jointly with the University of California, San Diego, and the station SVD was installed and operated by the USGS. The five

stations, PAS, GSC, PFO, SBC, and ISA and the data retrieval and analysis system at Caltech comprise the Whittier Advanced Geophysical Observatory, funded by the L. K. Whittier Foundation.

In addition to the permanent stations, TERRAscope includes portable PASSCAL type recorders with broadband sensors and GPS (Global Positioning System) receivers. The portable seismic instruments enable seismologists to easily reconfigure the network for their own projects, thereby increasing the versatility of TERRAscope.

TERRAscope complements and extends the capabilities of the existing 220 station (300 components) short-period Southern California Seismographic Network (SCSN). The data from TERRAscope will also be included in the SCSN data base used for generating the CIT/USGS southern California earthquake catalog. Because of their real-time capability and location in a populous earthquake-prone area, both networks enable seismologists to provide the public and state officials with timely information about significant earthquakes.

The TERRAscope stations are also included as a subnetwork of the global seismographic network, operated by IRIS, and the US National Seismic Network, operated by the USGS.

#### Data Availability

TERRAscope data are recorded in both continuous and event-triggered modes on site. The tape cartridges that contain continuous data are sent to the IRIS Data Collection Center at Albuquerque and archived at the IRIS Data Management Center. These data area available upon request from the IRIS DMC. The data stored on disk at each station are available through a dial-up modem, which is open to the general user.

For quick and efficient data access, an automatic dial-up data retrieving system called Caltech Gopher (adapted from the IRIS Gopher system) has been implemented. The Caltech Gopher receives mail from NEIC for teleseisms and the Southern California Seismographic Network with origin time, location, and magnitude for regional events. The Gopher retrieves data from all six TERRAscope stations for these events. The data reside in a FTP anonymous account (seismo.gps.caltech.edu; password: "your e-mail address") at the Caltech Seismological Laboratory, and are available to users through INTERNET. Usually the data are available within 15 minutes after the occurrence of a regional event and within several hours after the occurrence of a teleseism. When the Data Center of SCEC begins full operation in early 1992, it will take over distribution of earthquakes from southern California, including both TERRAscope Gopher data and continuous data from the tape cartridges.

#### Future Developments

With funds provided by the L. K. Whittier Foundation and Arco Foundation the plan is to deploy ten more broadband stations during 1991 and 1992. Although the actual locations have not been finalized, the following locations are being evaluated: San Nicolas Island, Los Angeles basin, Barrett, Glamis, Western Mojave, Eastern Mojave, Owens Valley, Superstition Mountain, the Coast Ranges of California, and Kaiserville, Nevada.

To have the data available for immediate analysis following a major event, two real-time telemetry systems are being tested. One is a satellite telemetry system that is being installed in cooperation with the USNSN. The other is based on data transmission over telephone lines or radio links and a local real-time data collection system developed by Adebahr Systemtechnik. Although the two systems provide different capabilities, they will complement each other; redundancy is desirable, especially in emergency situations after a large earthquake.

#### The CUBE Project

For several years the USGS has been developing an improved real-time data processing system which sends information about earthquakes to pagers carried by SCSN personnel. With the addition of the TERRAscope stations, more strong-motion stations, and recent advances in communications systems, the response time and accuracy of the earthquake information has been steadily improving.

In 1990, after a period of in-house testing with a prototype sytem. Caltech and the USGS initiated a new project called CUBE (Caltech-USGS Broadcast of Earthquakes). The goal of CUBE is to provide near real-time information for. emergency response following significant earthquakes in southern California. At this time several transportation and utility companies have joined the USGS, Caltech, and SCEC in a cooperative research project to develop a sophisticated real-time seismic information system. The participants are actively helping with the research and development of the new system. The CUBE project has already demonstrated its usefulness for response in seismic emergencies and has gained support in the community. After the Sierra Madre earthquake on 28 June 1991, the Santa Fe Railroad was able to significantly reduce their "down" time because of the rapid information that the CUBE system provided by pinpointing potentially hazardous areas of track.

The current system transmits information about the location and size of the earthquakes to pagers. Some of the pagers are connected to DOS-based computers with video terminals that display the earthquake on a map. Several interactive capabilities are available such as zoom. One of the options is the ability to display a circular region around the epicenter for which specified levels of peak ground acceleration would be exceeded. An important goal is the ability to more accurately estimate the spatial distribution of ground shaking following an earthquake. Plans are tentatively being drawn to develop a dense network of approximately 50 strong-motion instruments over the next few years in order to accommodate this goal.

## RESEARCH NOTES

## The June 28, 1991 Sierra Madre Earthquake

This M<sub>L</sub> 5.8 earthquake that occurred on June 28, 1991 at 14:43:54.5 GMT (7:43:54.5 PDT) under the San Gabriel Mountains was the largest event of the year. The epicenter was located 11 km (7 miles) north of Monrovia and 18 km (11 miles) NE of Pasadena (34° 15.7'N, 117° 59.7'W), and the depth of the rupture initiation was 12.3 km (7.7 miles). It was the most well-recorded earthquake to date. The mainshock was followed by 6 aftershocks of M≥2.5 within 24 hours, but was deficient in the number of small aftershocks (Hauksson and Jones, 1991; Ma and Kanamori, 1991).

All six TERRAscope stations (PAS, SVD, PFO, GSC, ISA, and SBC) recorded the earthquake on scale, and within two hours after the mainshock, several important determinations had been made (Kanamori et al., 1991). The maximum accelerations at several local sites were determined along with the M<sub>L</sub> and radiated energy, the mechanism, and the seismic moment.

Hauksson and Jones (1991) used first motion polarities to determine a mechanism of almost pure thrust on a plane striking ENE and dipping 50° to the north. Using the aftershock distribution and the mechanisms, they attributed the event to the Clamshell-Sawpit Canyon fault, a branch of the Sierra Madre fault system. They resolved aftershock depths between 9 and 14km, and some aftershock mechanisms indicated the existence of complex faulting. Ma and Kanamori (1991) used 21 aftershocks recorded on the broad-band TERRAscope stations and determined their mechanism and seismic moment. Their findings indicate that most of the aftershocks had a thrust mechanism like the main shock except a few east of the main shock which had a strike-slip mechanism.

Using acceleration records from California Division of Mines and Geology (CDMG) and USGS strong motion stations, in addition to short-period and broad-band records within 40km of the epicenter, Wald et al. (1991) resolved details of the rupture process using a finite fault source inversion. The event consisted of two distinct pulses ~0.3 seconds apart on a relatively small rupture area of 16 km² which was located down dip of the mainshock. The average slip on the fault was ~26 cm, and the maximum slip was 100 cm. They determined a seismic moment of  $3.5\pm1*10^{24}$  dyne-cm, a potency of 0.01km³, and a stress drop of 250 bars.

Zumberge et al. (1991) conducted a GPS (Global Positioning System) study with 12 Rogue receivers which they used to detect surface displacement associated with the earthquake. They found that the Jet Propulsion Laboratory (JPL) in Pasadena moved ~3 mm in the direction of W26°S. And finally, a geodetic study done by Hudnut et al. (1991) in which the geodetic measurement of the displacement field associated with the earthquake was compared to the synthetic displacement from elastic dislocation modeling, showed that there was no horizontal displacement >10 cm.

## Anomalous seismicity in the San Gabriel Valley 1987-1991

The rate of occurrence of moderate earthquakes in the San Gabriel Valley, east of the Los Angeles basin in southern California, has increased since 1987. Six earthquakes above M<sub>L</sub> 4.5 have occurred in this region after more than 50 years with no earthquake of this size, and without a similar increase in the rate of smaller earthquakes. We are at present undertaking research to better understand the characteristics of this increased seismicity. The most active fault system in the northern Los Angeles basin, where the earthquakes have been occurring, is the frontal fault of the Transverse Ranges which is raising the San Gabriel Mountains at 3-5 mm/yr (Crook et al., 1987) and was the causative fault of the 1971 San Fernando earthquake (Figure 3). The central portion of the frontal fault, called the Sierra Madre fault, has been seismically quiescent at the  $M_1 \ge 1.5$  level for at least the last 20 years (where the Caltech catalog is complete at this level) until the occurrence of the M<sub>1</sub> 5.8 Sierra Madre earthquake on this fault in June 1991 (Figure 3). To the east of San Antonio Canyon, the frontal fault is called the Cucamonga fault and is characterized by a higher level of background seismicity.

The moderate earthquakes of the last four years have been in the foot wall of the Sierra Madre fault (Figure 3). The two largest have resulted from thrust faulting on east-striking planes south (M<sub>L</sub>5.9 1987 Whittier Narrows) and north (M<sub>L</sub>5.8 1991 Sierra Madre) of the San Gabriel Valley. Two other events have resulted from left-lateral strike-slip faulting along the western (M<sub>L</sub>4.9 1988 Pasadena) and eastern (M<sub>L</sub>4.7 1988 and M<sub>L</sub>5.2 1990 Upland) edges of the Valley. Three of the four largest events (Whittier Narrows, Sierra Madre and Pasadena) have occurred within a narrow band along the western edge of the San Gabriel Valley. The faults of these three earthquakes all strike between N60°E and eastwest, even though the rakes have varied from 0° (pure strike-slip) to 90° (pure thrust).

Several features of the recent seismicity have been unusual. First, four of the six moderate earthquakes (all but the two Upland earthquakes) that occurred in a small region of the western San Gabriel Valley have all occurred below 10 km depth. The most unusual aspect of the depth distribution of these earthquakes is that not only did these events nucleate at relatively great depths, but that the full extent of all the rupture planes (as delineated by the aftershock hypocenters) are below 10 km. Second, the aftershock sequences of the western San Gabriel earthquakes have been deficient in small aftershocks, with b-values for the two largest events of 0.65 (Whittier Narrows) and 0.6 (Sierra Madre), among the lowest recorded in California. The greater depths of the western San Gabriel Valley earthquakes could be the cause of their low b-values (Figure 4). Third, the western San Gabriel earthquakes have also had high stress drops, an order of magnitude larger than those of other earthquakes recorded on TERRAscope. Fouth, the larger earthquakes of the last four years  $(M \ge 4.9)$  have been moving northnortheastward towards the Sierra Madre fault at 6.7 km/yr. Three of the events (Whittier Narrows, Pasadena and Sierra

Madre) lie within a very narrow east-west band. The Upland earthquake is 30 km east of the other three events but is within the region of the seismicity gap on the Sierra Madre fault. Fifth, the dramatic increase in the rate of moderate earthquakes seen in the San Gabriel Valley has occurred without a similar change in the microseismicity. A comparison of the distribution for the five years from 1981 to 1986 with the distribution for the 3 3/4 years from 1/1987 to 10/1991 for earthquakes within the box shown in Figure 3 shows that for the period 1987 to 1991, the magnitudefrequency distribution of the earthquakes departs significantly from the normal, linear distribution, with more earthquakes above magnitude 4 than would be predicted by the rate of occurrence of the smaller earthquakes (Figure 5).

One way to explain these findings is through a model of aseismic creep on a detachment surface below the San Gabriel Valley. If a detachment surface exists between the brittle and ductile crust, a creep event could have moved along this detachment over the last four years with a surge in the horizontal slip, i.e., an edge dislocation. A dislocation moving along this surface will lead to decompression of the overriding crust. The changes in the stress state associated with the creep front will trigger faults with the correct orientation if they are close to failure and pass by faults not advantageously oriented or those not already close to failure. The question of whether future earthquakes will occur within this episode becomes a question of the orientation of the fault and how close it is to failure - the last, of course, being unanswerable with the present state of knowledge. Research is continuing on this anomaly in the seismicity and possible ways to explain it.

## Radiated Energy Estimates

Kanamori has suggested a method of estimating radiated energy by using the integrated value of a velocity-squared seismogram ( $\sqrt{v^2}dt$ ). Using this quantity with appropriate expressions for the distance attenuation, q(r), and the assumed source radiation pattern, one can determine a value for the radiated energy.

$$E = 7.87 \times 10^{5} r^{2} \left[ r_{o} q(r_{o}) / r q(r) \right]^{2} \int v^{2} dt$$

where r is the epicentral distance and  $r_0$  is the depth. The distance attenuation used was

$$q(r) = cr^n exp(-kr)$$

with c=0.497, n=1.28 and k=0.0053. This method was tested using 66 events of magnitude 3.5 to 5.5 that were well-recorded over the last several years by the low-gain and FBA components of the network. Each event was recorded by 5 to 27 components. The results of the energy estimated from each record are compared to estimate of the local magnitude (ML) as determined from the same record. There is a good correlation between the radiated energy and the local magnitude (Figure 6). A regression of these data gives a relationship,

$$\log E = 8.7 + 2.2 \,\mathrm{M_L}$$

A similar relationship has also been derived from data recorded on the broadband TERRAscope instruments. This result is quite different from the traditional Gutenberg-Richter relationship,

 $\log E = 11.4 + 1.5 M_{\rm L}$ 

## Southern California Historical Magnitudes

The early history of the Southern California Seismographic Network is intimately connected with the development of the local magnitude scale by Charles Richter and Beno Gutenberg in the mid-1930's. Until now, the staff of the Seismological Laboratory have tried to preserve as much as possible the original intent and techniques of this socalled "Richter scale" for most of our recorded events. The result is one of the more consistently calibrated local earthquake catalogs in the world (Hileman et al., 1974; Friedman et al., 1976; Hutton et al., 1985; previous Southern California Network Bulletins). No history of measurements of any natural phenomenon can be completely consistent in the face of technological change, and with earthquake magnitude the challenge is compounded by the arbitrary nature of its definition.

In its summary form, which is widely utilized, the southern California earthquake catalog contains only date, time, epicentral location, depth, and one magnitude, plus some other incidental information. In order to conserve space and to avoid confusing the non-scientific users of the catalog, it is left to us to decide which magnitude is "the right one" for each event. Depending on the size of the event and the equipment available when it occurred, that magnitude could have been determined in any of several ways. Local magnitude  $(M_I)$  is only one of the possibilities. Each of the various magnitude types is designated by a code, such as  $M_L$ ,  $M_{CA}$ ,  $M_D$ , etc. and will be discussed individually.

At the time of this writing, we stand at the edge of completely revising our methods of "sizing" local Seismic moment (M<sub>o</sub>) and moment earthquakes. magnitudes, as well as energy magnitudes (Mw), have been used for a long time with large teleseisms. Modern broadband instrumentation can now bring such physical measurements to smaller events, as well. The "Richter scale" is deeply ingrained in the public and, to a lesser extent, the professional concept of earthquakes. Better results than ever are certain to come out of the new technology, but some care must be given to maintaining continuity with the past.

Now is a good time to summarize this past. The intent here is to bring together as much lore and real information as possible about the Seismological Laboratory's historical determination of magnitude for local earthquakes, and to alleviate some of the confusion that arises from the proliferation of magnitude types.

M<sub>L</sub>
The original Richter scale, or more properly, local magnitude scale, was defined by Richter (1935) in order to distinguish small, medium, and large earthquakes in the early southern California earthquake catalog. All estimates of earthquake size up to that time were intensities, or estimates of the level of damage or perception of the severity of shaking caused by the quake, and these were considered too skewed by uneven population density to provide much information about the earthquake itself. The new Wood-Anderson torsion seismometers (Anderson and Wood, 1925), which were intended mainly to record local earthquakes at short-periods, had then been operating for several years at the various stations managed by the Seismological Laboratory. The Wood-Anderson's optics and mechanics are simple and the instrument was considered easily understood and stable over a long period of time. Richter arbitrarily defined the earthquake magnitude as the logarithm of the peak amplitude (in microns) of a hypothetical Wood-Anderson record, made 100 km from the epicenter. Corrections for distances other than 100 km were then determined empirically using a set of 12 well-recorded southern California earthquakes and expressed in tabular form (Richter, 1958). For fear of causing a discontinuity in the routine determinations, that table has been in use ever since.

In the beginning, magnitudes were only assigned to the nearest half unit, in most cases, which was considered accurate enough for the purpose at hand. Furthermore, at that level of precision, the magnitude determinations from most stations were in agreement, so a rigorous procedure for averaging various estimates is not necessary. At times magnitudes were listed with quarter unit precision. However, a magnitude of 5 3/4 tends to quickly be translated to 5.75 by the press (implying more precision than intended), so it is not difficult to understand why this practice evolved into the tenth of a unit precision that is now commonly used. Hileman et al. (1974), in their much quoted earthquake catalog for 1932 through 1972, list all magnitudes this way, even though most of them prior to 1944 are M3.0 or 3.5, etc.

Richter's protocol seems simple enough. However, quoting magnitudes to the nearest 0.1 unit requires attention to a few details which, unfortunately, have not been documented very well. Station corrections for each site, for example, significantly reduce the standard deviation of the various readings for a given earthquake. The station corrections were determined empirically, based on the residuals in routine magnitude computations, but only the person who carried out the procedure knows which earthquakes were used. It should be added that the station corrections have since been recomputed with various data sets. By far the largest one was that of Hutton and Boore (1987). The results agree very well with Richter's originals.

Also, current routine practice is an oral history, handed down from analyst to analyst over the years. An example of how this is a problem is the reading of the amplitude itself. The amplitudes are currently read, on the photographic Wood-Andersons, as one-half the peak-to-peak distance on the largest single swing of the S wave. This procedure differs slightly from that specified in Richter's book. Richter (1958) calls for use of the largest amplitude regardless of what phase it belongs to, whereas Gutenberg and Richter (1956) say to ignore any P phase. The largest overall amplitude is the preferred measurement for a computer program, for simplicity's sake. However, the actual routine procedure seems to have been in effect for a long time. A change to the overall peak might introduce a systematic error. Since the largest wave is often asymetrical, the peak amplitude would tend to give a higher reading. Of course, a new set of station corrections would offset a systematic error like that. Ideally, the type of measurement that proves most consistent is the one that should be used, but it is not clear which that would be. It is not even clear exactly how the early measurements were done, as we will see below.

Another question that comes up is the procedure for determining the assigned earthquake magnitude from the suite of station magnitude estimates. The current routine is to compute a magnitude for each Wood-Anderson instrument (generally two per station, if both horizontal components are being recorded), apply the station corrections, and then take the median of the values to obtain the local magnitude of the earthquake. In the past the local magnitude appears to have been chosen from the list of station magnitudes by an undefined and somewhat subjective method, based partly on the analyst's experience with the reliability of individual stations. Richter (1958) states that the mean of the estimates should be used. Statisticians prefer the mean. However, the median tends to minimize the influence of outlying readings and provides a more robust estimate for a small number of readings.

If any readings were excluded because the stations were considered unreliable, this information has generally been lost

The distance correction table is also systematically skewed compared with the averaged data (Hutton and Boore, 1987), at least for stations at distances beyond about 250 km. Because the larger earthquakes have legible records only beyond that distance, that makes their magnitudes wrong as well. "Wrong" in this context means inconsistant with the determinations for the smaller earthquakes made at nearer distances and with the definition of the local magnitude as a logarithmic scale. Hutton and Boore concluded, however, that because so many other types of earthquake magnitudes were calibrated to "look like" the local magnitude as historically practiced in southern California, it makes no sense to say that the magnitudes in the historical catalog are wrong. Furthermore, a substantial downward revision of the magnitudes of famous and damaging historical earthquakes can be expected to produce somewhat of a public outcry.

The smallest amplitude readable on a photographic drum record such as those produced by the Wood-Anderson instruments is about 0.1 mm. The largest, practically speaking, is about 100 mm; even at amplitudes smaller than 100 mm, the record may be so underexposed that the analyst cannot identify the peaks with certainty. Caltech's Wood-Andersons are equipped with a switch triggered by the highgain short-period vertical instrument at the site, which brightens the light source during recording of an earthquake. Even then, peak identification can be difficult. These constraints limit the usefulness of the optical Wood-Andersons to local earthquakes between magnitudes of about 2.5 and 6.0. In the computer age any digitally recorded or digitizable seismogram can be transformed into a synthetic Wood-Anderson recording, provided that the instrument response is well enough understood. The synthetic records allow M<sub>L</sub>'s to be determined for much larger or much smaller earthquakes. It turns out, however, that there is some controversy over the magnification of the real Wood-Anderson instruments. Shake-table calibrations are presented by Gutenberg (1957) that verify the theoretical (Anderson and Wood, 1925) amplification of 2800. On the other hand, Urhammer and Collins (1990) argue a good case for an amplification of 2100. As long as a magnitude scale is defined in terms of the actual performance of real Wood-Anderson instruments, the exact magnification does not matter. However, the synthesis of Wood-Anderson records requires that an assumption be made about the magnification. Use of empirical station corrections based on earthquakes with "real" local magnitudes can eliminate any uncertainty about magnification. However, there must be enough data for them to be determined.

The distance correction problem could be more serious. The use of nearby synthetic records for large earthquakes makes the median magnitude lower than that determined from real records at distances greater than 250 km. This could produce a noticable discontinuity in the historical catalog for larger events. Fortunately perhaps, the local magnitude saturates above about 6.5 anyway (Kanamori, 1983), meaning that although quakes can be larger and longer in duration, they do not produce higher amplitudes on a short-period instrument like the Wood-Anderson. It makes sense to use other magnitudes above that level.

This distance correction problem has already shown up with the use of the several film-recorded low-gain torsion instruments operated by the Seismological Laboratory. With these, the magnification is nominally either 4 or 100, instead of 2800. The earthquakes that have usable records on both these and the regular Wood-Anderson's are few, however, so the station (instrument) corrections are very poorly known. In any case, these recordings will be discontinued soon because of a unique problem: the films are identified by a "stamp" with radioactive paint on it. These have now decayed to the point that the stamps are completely unreadable, and for safety reasons they are not replacable. At the moment we lean toward not using the 100X torsions at all. However, any number of the old magnitudes above about 6.0 could be based on these instruments.

For now, the distance correction table, the procedures, and the magnitudes remain as they have always been.

Me

Following Richter's original work, the concept of instrumental magnitude was broadened to include larger earthquakes, smaller earthquakes, earthquakes at teleseismic distances, and instruments other than the Wood-Anderson torsions (Gutenberg and Richter, 1942 and 1956; Kanamori 1983).

Prior to 1973, the Network located very few earthquakes smaller than M2.5, so M<sub>L</sub> was adequate at the small end of the scale. But occasionally there were large earthquakes which generally elicited a large scientific and public interest. Some events, like the Long Beach earthquake of 1933 (M<sub>L</sub> 6.3), have fairly well documented magnitudes (Richter 1935). In that case, the local magnitude was deduced by comparing lower amplitude parts of the seismogram to the same parts of some aftershocks whose peak amplitudes were readable. With other events, for example the 1940 Imperial Valley earthquake (M<sub>L</sub> 6.4 or 6.7, or 7.1, depending on the reference), it is far less clear where the catalog magnitude came from. Many values may have been teleseismic surfacewave magnitudes (M<sub>S</sub>, as in the case of the 1952 Kern County earthquake (M<sub>S</sub> 7.7).

Currently we prefer to insert published surface wave magnitudes, or moment magnitudes (Hanks and Kanamori, 1979) when they are available, for all earthquakes above about M6.0 (Hutton and Jones, 1992).

M

The number of stations deployed in southern California began increasing in the early 1970's, with the beginning of collaboration between Caltech and the U.S. Geological Survey. Additional earthquakes were recorded, most of them too small to be recorded on the Wood-Anderson instruments. Until the advent of computerized recording in 1977, methods of data recording and analysis tended to differ somewhat between the two offices. Therefore, a couple of different schemes evolved to estimate the magnitudes of these smaller events.

Caltech continued to emphasize the recording and analysis of a complete catalog of earthquakes above a certain magnitude, which had been about M<sub>1</sub> 3.0 inside of the Network. The addition of several new stations caused the threshold of completeness to drop about M<sub>1</sub> 2.5, thus covering most of the earthquakes that were felt by the general populace. In addition to the Wood-Anderson instruments, each station was equipped with a high-gain, short-period vertical seismometer of Benioff or equivalent design. The seismometers had an electrical output and were either recorded photographically via galvanometer or telemetered to Caltech and recorded on visible drum recorders (helicorders, hence the designation M<sub>H</sub>). The Benioff-type instruments do not have the exact frequency response of the Wood-Anderson, but they are close enough that the usual procedure, with the application of station (instrument) corrections produces relatively consistent estimates. The station corrections were determined from earthquakes whose local magnitudes could be determined from the Wood-Andersons.

Because no great effort was ever made to keep the gains of the telemetry systems or the drums constant, the  $M_H$  magnitudes are last resort magnitudes, to be used when nothing else is available.  $M_H$  was often used for immediate release to the press, however, since the visible drum rack provided a convenient place to measure as many amplitudes as possible.

As the catalog stands now, many events that occurred in 1977 and 1978 have either no magnitude or an  $M_{\rm H}$  magnitude. This is because the software for magnitude computation developed more slowly than that for timing and epicentral location. As we finalize that part of the catalog, coda amplitude magnitudes (discussed below) will replace most of the  $M_{\rm H}$  magnitudes.

 $M_D$ 

In the 1970's, the U.S. Geological Survey tended to install stations and concentrate analysis in a few geographic areas of selected interest, like Imperial Valley or the eastern Mojave. They used recording and analysis methods already established in Menlo Park for northern and central California. All stations, including the Caltech ones which were also on drums, were recorded on malodorous microfilm units called develocorders. In most cases, the earthquakes themselves are very underexposed on develocorder films, so that amplitudes were unreadable. The total duration of the signal was used as an estimate of the magnitude (Lee et al., 1972). The central California formula was probably used; no calibrations specific to southern California were ever published.

M<sub>D</sub> is the most common type of magnitude found in the catalog for events smaller than about M2.5 to 3.0 (depending on the epicentral location), between 1974 and 1976. Beginning in 1992, M<sub>D</sub> again appears on a few events for which the coda amplitude algorithm (M<sub>CA</sub>) will not work properly, because of noise or other reasons. As before, the calibration is the central California calibration, and at first glance, the M\S\DO3(D)'s appear to be 0.1 or 0.2 smaller than the M<sub>CA</sub>'s for the same events. This conflict deserves further investigation.

M<sub>CA</sub>
With the advent of digital on-line recording of the telemetered signals in 1977, a more easily automated method was needed for measuring magnitude. Because of limits on the dynamic range of the signals imposed by the instrumentation and telemetry, many peak amplitudes are lost to clipping, even for relatively small earthquakes. A peak amplitude magnitude is therefore impractical. Since the archived seismogram data is in triggered form rather than continuous, the trigger often clips off the end of the coda, so M<sub>D</sub> is often not practical. Between the time the amplitude is clipped and the end of the trigger, however, there is usually a section of the coda that is usable (if it isn't cluttered by aftershocks). It is now well established (Aki, 1969; Aki and Chouet, 1975; Rautian and Khalturin, 1978; Aki, 1980, among many others) that the coda of a local earthquake is made up of S waves that have been scattered off of various subsurface features and topography in the crust. The larger the earthquake, the greater the distance over which scattered waves are detectable, and the longer the coda. This is why M<sub>D</sub>, total signal duration, works as a magnitude estimate. Johnson (1979) fit an exponential decay curve to the usable portion of each coda and then used that curve to estimate what the coda amplitude would be at a standard time after the P arrival, even if the record was unreadable or missing at that time. This pseudo-amplitude is then related to the magnitude of the earthquake through the station magnification. We call this magnitude estimation M<sub>CA</sub>, for coda amplitude

In practice, each station is calibrated for M<sub>CA</sub> every three months, to account for the changes that are made to the field instrumentation and telemetry, against all earthquakes during that time period for which M<sub>L</sub> was determined. The method works rather well below about M4.0. Above that level, most triggers do not contain enough on-scale coda for a good estimate. Even earthquakes as small as M0.8 are commonly assigned an M<sub>CA</sub>, although many small ones do not contain enough coda. M<sub>CA</sub> is not workable for some earthquakes that are very close together in time.

### Historical Summary 1932 - 1943

During this time period an ever increasing but still small number of stations were operated by the Seismological Laboratory. All recordings were made photographically, and all stations were equipped with at least a Benioff short-period vertical and a pair of Wood-Andersons. Most earthquakes of M<sub>L</sub> 3.0 or larger inside the network were included in the catalog, except during aftershock sequences. In the greater Los Angeles area many smaller earthquakes appear as well. Except for events over M<sub>1</sub> 6.0, all magnitudes are presumed to be M<sub>1</sub>. Most above that limit are probably teleseismic magnitudes, notably  $M_S$ .

Most magnitudes were only reported to the nearest half unit, and amplitudes were apparently only very roughly measured. Hutton and Jones (1992) have remeasured the amplitudes for most earthquakes above ML4.8 and found many of them to have been overestimated. Many of the magnitudes, therefore, were also overestimated by a few tenths of a point.

#### 1944 - 1971

Over this time period, the number of recording stations increased slowly. In the late 1960's a trend toward telemetered stations was apparent. The old Wood-Anderson instruments remained, and a few were moved to other sites, but no new ones were added. A somewhat larger number of earthquakes per year appear in the catalog, indicating a greater degree of completeness. The amplitudes seem to have been read according to modern standards. The difference between the M<sub>L</sub> and what would be computed today from those amplitudes shows a degree of scatter, but the systematic difference is less than 0.1 unit.

#### 1972 - 1976

The Network was transformed during this period into a large regional operation through a cooperative agreement with the U.S. Geological Survey. Although the original visible drums and the Wood-Andersons remained, most of the newly installed stations were short-period vertical only with standardized instrumentation specified for the U.S.G.S. Central California Network. The bulk of the recording was on develocorder. An unknown number of the smaller cataloged shocks are listed with duration magnitudes (M<sub>D</sub>) or amplituded magnitudes computed from the visible drums  $(M_H)$ .

#### 1975 - 1976

Duration magnitudes are intermixed with M<sub>L</sub>'s and M<sub>H</sub>'s during this period. Earthquakes in different geographic areas were processed either by Caltech or by the U.S. Geological Survey, depending on special research interests. The completeness of the catalog is geographically uneven. Efforts are currently being made to finalize the earthquakes above about M2.5 during this period and to identify the source of the magnitude estimate in each case.

#### 1977 - 1979

This time period was that of our earliest attempt at computer automation; the CEDAR system (Caltech Earthquake Detection and Recording). Some of the software was slow to become operational, and all of the data need to be finalized. As the catalog stands now, many of the magnitudes are M<sub>L</sub>, some are M<sub>H</sub>, and some are just plain zero, meaning that no magnitude was computed.

#### 1980 - March 1981

During much of 1980, data were recorded on computer, but not processed due to lack of software. An interim catalog was constructed, using mostly M<sub>L</sub> and M<sub>H</sub> magnitude estimates. Clearly, this period of time needs a great deal of attention.

#### April 1981 - present

Although some of this time period is still being finalized and some (May through July 1983) still needs to be processed (another interim catalog is used during that gap in processing), the rest is in good shape. Most earthquakes of M2.5 or larger have  $M_L$  magnitudes. The bulk of the rest of them are  $M_{CA}$ . The smallest ones have no magnitudes (ie. 0.0), since they were too short in duration for the  $M_{CA}$  algorithm. Since the beginning of 1992, a few  $M_D$ 's, in a computer automated incarnation, have crept in.

#### What Now?

With our seven broadband TERRAscope stations and our increased understanding of the response of the short-period instruments, we now have the capability of computing  $M_L$  or moment magnitude, or both, from literally dozens of stations for most earthquakes, very large and very small. Long-term plans are being laid to place the whole Network at the mercy of the microwave telemetry system by scrapping the outside photographic stations, including the Wood-Andersons in the not-too-distant, geologically speaking, future.

There are strong advantages to these changes, not the least of which are better and faster locations and more usable waveforms. More internal consistency would probably result from such use of the same algorithms across the whole dynamic range of earthquake recording. Also, more reliable magnitudes would be available faster after a damaging earthquake, when the most people are the most interested.

However, a discontinuity in the historical magnitudes will certainly occur. For example, the distance correction problem may show itself in the data from high-dynamic-range TERRAscope instruments, which can produce synthetic Wood-Anderson records for just about any earthquake at any distance. As mentioned above, use of nearby measurements where this was not possible before can be expected to produce magnitudes smaller than we are used to seeing for the larger earthquakes.

One obvious alternative would be to computerize all the archival amplitude readings and recompute all the magnitudes, old and new, based on a revised distance table. The computerization part is a project currently being undertaken by the Southern California Earthquake Center. Many earthquakes could end up with magnitudes 0.3 or 0.4 smaller than their traditional values, however.

Another alternative would be to stop using the local magnitude scale altogether and switch to moment magnitude, which is now, in the computer age, a reasonable option to consider. Some people think that moment magnitude makes more physical sense than the arbitrary local scale, and it has already been calibrated to approximate traditional local magnitudes in the range where both are applicable. A break in the magnitude scale, between local magnitudes before a certain date and moment magnitudes afterward, might be tolerable. Because moment magnitude has been calibrated to "look like" traditional  $M_{\rm L}$ , the difference might be less than that caused by using nearby readings for large earthquakes.

Such options are currently under discussion.

## SYNOPSIS OF SEISMICITY

A total of 12,194 earthquakes and 1485 blasts were cataloged for 1991 (Figure 7). Of the cataloged events, 133 were greater than or equal to  $M_L$ 3.0 (Appendix A, Figure 8). The largest earthquake in 1991 had an  $M_L$  of 5.8 and was located near Sierra Madre. Focal mechanisms for 18 events ( $M_L \ge 3.5$ ) are shown in Figure 9.

For the following discussion southern California has been divided into eleven sub-regions (Figure 10). These regions are arbitrary, but useful for discussing characteristics of seismicity in a manageable context. Figures 11a and 11b summarize the activity of each sub-region over the past four years. A separate discussion section follows for those regions with notable activity.

## Imperial Valley - Region 1

Swarms, common to this area, occurred on several occasions throughout the year, in addition to a few solitary events of  $M_L \ge 3.0$ . An  $M_L 3.3$  was the largest event in a swarm in the Cerro Prieto area (in Mexico ~30 miles SW of Yuma, Arizona) near the southern end of the Imperial Fault on 16 July. On 10 September there was a swarm of five events in the lower Brawley Seismic Zone. A relatively large swarm of about 21 events occurred in the Cerro Prieto area (42 km SSE of Mexicali) at the beginning of November with the largest events being an  $M_L 3.3$  and  $M_L 3.4$ .

## South San Jacinto - Region 2

The San Jacinto Fault is always highly active with many small events and 1991 was no exception. An  $M_L 3.4$  earthquake occurred on 24 May near Ocotillo Wells on the San Jacinto fault and was followed by two small aftershocks On 9 July there was an  $M_L 3.7$  event (Figure 9, Number 6) 23 km SE of Anza on the section of the fault that separates into several distinct branches. This earthquake was felt in Palm Springs and followed by five aftershocks in the proceeding days. An  $M_{CA} 3.1$  also was located at this site in late November.

An  $M_L4.0$  (Figure 9, Number 8) occurred on 19 July near Salton City and was followed by ten aftershocks of  $M_L \le 2.0$ . The mainshock had a strike-slip mechanism with a trend parallel to the San Jacinto Fault. This earthquake was felt in the Palm Desert area. An  $M_L3.5$  with seven aftershocks shook the Salton City area again on 26 September. On 27 October an  $M_{CA}3.5$  (Figure 9, Number 10) with five small aftershocks occurred near Idyllwild and was felt by local residents.

## South Elsinore - Region 3

This area was relatively quiet with only two notable events. A group of nine events (all  $M_{CA}$ <3.0) occurred in early November 42 km west of El Centro in the Yuha Desert. An  $M_L$ 3.7 occurred on 30 May near Julian. On 4 December there was an  $M_L$ 4.2 (Figure 9, Number 11) 8 km NE of Ramona (or 18 km west of Julian) that was felt as far away as San Diego. This event was located in an historically very quiet area west of the Elsinore Fault, and it did not have any aftershocks.

## San Diego - Region 4

Almost all the activity in this region was located offshore. The first sizable earthquake of the year was an  $M_L$ 3.7 located 34 km south of San Diego on 5 March that was felt in the San Diego area. An Oceanside aftershock (the mainshock was an  $M_L$ 5.3 on 13 July, 1986) of  $M_L$  3.4 occurred on 13 June. The remainder of the year was relatively quiet.

### Los Angeles Coast - Region 5

The Los Angeles area experienced a number of small earthquakes throughout the year, some of which were felt by local residents. An M<sub>L</sub>3.5 occurred on 9 April that was located near Avalon, Catalina Island, but no inquiries were received about it. Later that month there was an M<sub>L</sub>3.2 near Redondo Beach that had two aftershocks. This earthquake was widely felt in the South Bay area.

### North Elsinore - Region 6

Aftershocks from the 28 February, 1990 Upland earthquake continued throughout most of the year, and the activity in the Ontario area that began in October 1990 also persisted.

The largest earthquake of the year in southern California occurred on 28 June at 14:43 GMT. It was an M<sub>L</sub>5.8 located 11 km north of Monrovia (Figure 9, Number 4) under the San Gabriel Mountains. It was a thrust event with a trend roughly parallel to the Sierra Madre fault zone, with the north side moving up and over the south side. For further details see the article entitled *The June 28, 1991 Sierra Madre Earthquake* in the Research Notes section.

On 2 October there was an M<sub>L</sub>3.4 event near Yorba Linda that was felt in the epicentral area. The three aftershocks, however, were not felt.

## San Bernardino - Region 7

This region, as usual, had the most activity, as far as numbers of significant earthquakes are concerned. The swarm in Lucerne Valley that began near the end of December 1990 continued through the first few months of 1991. The Big Bear area experienced an M<sub>L</sub>3.7 (Figure 9, Number 1) with three aftershocks on 8 March that was felt in the area, and an M<sub>L</sub>4.0 (Figure 9, Number 12) on 4

December that was felt as far away as San Bernardino. The San Bernardino area also experienced an earthquakeof  $M_L 3.5$  on 3 August.

In April a swarm occurred near Indio that included about 16 events. In mid-October there was a swarm near Pushawalla Canyon in the Little San Bernardino Mountains. On 12 October there were five events that exceeded magnitude 3.0, including two M<sub>CA</sub>3.5's 5 minutes apart. Several swarms of this nature occurred in the area in April of 1990

In July the Anza area experienced a small swarm of ten events during one week. In May, an  $M_L3.7$  (Figure 9, Number 3) and an  $M_L3.5$  occurred on the San Jacinto Fault 3 km NE of Hemet followed by nine aftershocks  $\geq M_L1.5$  within 24 hours. These events are common for this portion of the fault below the locked zone. An  $M_L3.4$  was the largest member of a swarm of events near Indio in April. An  $M_L3.4$  was located near Mecca in January that was deeper than most earthquakes in this area. There was a cluster of events in the Bombay Beach area, on the east shore of the Salton Sea, on 20 July, and on 4 February there was a small swarm in the nearby Brawley Seismic Zone under the Salton Sea; the largest event was an  $M_L2.7$ .

## North Mojave - Region 8

A cluster of events occurred during the later part of July into the beginning of August near Barstow with about 35 events total; the largest event was an  $M_L 2.7$ . On 29 June there was an  $M_L 3.6$  and an  $M_L 4.0$  (Figure 9, Number 5) a few seconds apart 48 km east of Barstow.

## South Sierra Nevada - Region 9

In the Lake Isabella area an M<sub>L</sub>3.4 event occurred on 23 September at a site 40 km NNE of the lake. An M<sub>L</sub>3.5 was the largest of a sequence of six events 23 km SE of Lake Isabella on 3 April. On 11 November an M<sub>L</sub>3.4 shook the area under Rocky Point on the NE shore along with four small aftershocks. The mainshock was felt in the area.

An unusual sequence of 29 events occurred December 19-25 very near the Garlock Fault about 27 km ESE of Ridgecrest. The largest events included an M<sub>L</sub>3.4 and M<sub>L</sub>4.1 (Figure 9. number 13) on 20 December. The mechanisms were strike-slip, consistent with the east-west trend of the Garlock Fault. This activity occurred on the less seismic western portion of the fault (Astiz and Allen, 1983), and the M<sub>L</sub>4.1 was the second largest event on this portion of the fault since 1930. The largest event was an M<sub>L</sub>4.3 in 1974.

## Santa Barbara - Region 11

The Santa Barbara Channel had prolific seismicity during the first week in August including 11 events on 3 August within a seven hour period (the only one larger than M<sub>L</sub>2.0 was an M<sub>L</sub>2.3). This activity was located about 14 km SW of Santa Barbara.

An event with an unusually long-period signal was recorded 31 January and located 14 km SSE of Santa Maria. The event had an  $M_L$  of 3.5, and although the signal was

unusual, this phenomenon had been recorded in this area previously.

An M<sub>L</sub>3.5 (Figure 9, Number 2) was felt in Fillmore on 12 April, and on 5 July an M<sub>L</sub>4.1 (Figure 9, Number 7) was located 5 km SE of Castaic dam. It was followed by 19 aftershocks in the following weeks.

## References

- Aki, K. (1969). Analysis of the seismic coda of local earthquakes as scattered waves, J. Geoph. Res., v. 74, pp. 615 631.
- Aki, K. (1980). Scattering and attenuation of shear waves in the lithosphere, J. Geoph. Res., v. 85, pp. 6496 6504.
- Aki, K. and B. Chouet (1975). Origin of coda waves: source, attenuation, and scattering effects, J. Geoph. Res., v.80, pp. 3322 3342.
- Anderson, J.A. and H.O. Wood (1925). Description and theory of the torsion seismometer, Bull. Seism. Soc. Am., v. 15, pp. 1 72.
- Astiz, L. and C.R. Allen (1983). Seismicity of the Garlock Fault, California, Bull. Seism. Soc. Am., v. 73, pp. 1721 1734.
- Crook, R. J., C. R. Allen, B. Kamb, C. M. Payne and R. J. Proctor (1987). Quaternary geology and seismic hazard of the Sierra Madre and associated faults, western San Gabriel Mountains, California, in Recent Reverse Faulting in the Transverse Ranges, California, U.S., U. S. Geological Survey Professional Paper 1339, U. S. Government Printing Office, 27-64.
- Friedman, M.E., J.H. Whitcomb, C.R. Allen and J.A. Hileman (1976). Seismicity of the Southern California Region: 1 January 1972 to 31 December 1974, Seismology Laboratory, California Institute of Technology, Pasadena CA, 93 pp.
- Given, D. D., Hutton, L. K. and L. M. Jones (1987). The Southern California Network Bulletin, July December, 1986: U.S. Geological Survey Open-File Report 87-488, 40 pp.
- Gutenberg, B. (1957). Effects of ground on earthquake motion, Bull. Seism. Soc. Am., v. 47, pp. 221 280.
- Gutenberg, B. and C.F. Richter (1942). Earthquake magnitude, intensity, energy and acceleration, Bull. Seism. Soc. Am., v. 32, pp. 163 191.
- Gutenberg, B. and C.F. Richter (1956). Earthquake magnitude, intensity, energy and acceleration, Bull. Seism. Soc. Am., v. 46, pp. 105 145.
- Hanks, T.C. and H. Kanamori (1979). A moment magnitude scale, J. Geoph. Res., v. 84, pp. 2348 2350.
- Hauksson, E. and L.M. Jones (1991). The 1991 Sierra Madre Earthquake, EOS, Trans., Am. Geoph. Union, v.72, no.44, p.319.
- Hileman, J.A., C.R. Allen and J.M. Nordquist (1974). Seismicity of the Southern California Region; 1 January 1932 to 31 December 1972, Seismological Laboratory, California Institute of Technology, Pasasena CA, 489 pp.
- Hudnut, K.W., Y. Bock, C.M. Machacek and R.R. Zitola (1991). Geodetic Study of the Sierra Madre Earthquake, EOS, Trans., Am. Geoph. Union, v.72, no.44, p.319.
- Hutton, L.K., C.R. Allen and C.E. Johnson (1985). Seismicity of Southern California: Earthquakes of ML3.0 and Greater, 1975 through 1983, Seismological Laboratory, California Institute of Technology, Pasadena CA, 142 pp.
- Hutton, L.K. and D.M. Boore (1987). The ML scale in southern California, Bull. Seism. Soc. Am., v. 77, pp. 2074-2094.
- Hutton, L.K. and L.M. Jones (1992). Local magnitudes and apparent variations in seismicity rates in southern California, submitted to Bull. Seism. Soc. Am.
- Johnson, C.E. (1979). CEDAR -- An approach to the computer automation of short-period local seismic networks, Ph.D. dissertation, California Institute of Technology.
- Kanamori, H. (1983). Magnitude scale and quantification of earthquakes, Tectonophysics, v. 93, pp. 185 199.

- Kanamori, H., E. Hauksson and T. Heaton (1991) Experiment Toward Realtime Seismology Using TERRAscope: The Sierra Madre Earthquake, EOS, Trans., Am. Geoph. Union, v.72, no.44, p.320.
- Lee, W.H.K., R.E. Bennett and K.L. Meagher (1972). A method of estimating magnitude of local earthquakes from signal duration, U.S. Geological Survey Open File Report 28.
- Ma, K. and H. Kanamori (1991) Characterization of the Aftershock Sequence of the June 28, 1991, Sierra Madre Earthquake Using Broadband Waveforms, EOS, Trans., Am. Geoph. Union, v.72, no.44, p.320.
- Rautian, T.G. and V.I. Khalturin (1978). The use of the coda for determination of the earthquake source spectrum, Bull.Seism. Soc. Am., v. 68, pp. 923 943.
- Richter, C.F. (1935). An instrumental magnitude scale, Bull. Seism. Soc. Am., v. 25, pp. 1 31.
- Richter, C.F. (1958). Elementary Seismology, W.H. Freeman and Co., San Francisco, California, 578 pp.
- Urhammer, R.A. and E.R. Collins (1985). Synthesis of Wood-Anderson seismograms from broadband digital records, Bull. Seism. Soc. Am., v. 80, pp. 702 716.
- Wald, D.J., D.V. Helmberger and H. K.Thio (1991) Strong Motion and Broadband Teleseismic Analysis of the 1991 Sierra Madre, California Earthquake, EOS, Trans., Am. Geoph. Union, v.72, no.44, p.319.
- Wald, L.A., L.K. Hutton, J. Mori, D.D. Given and L. M. Jones (1991). The Southern California Network Bulletin, January December, 1990: U.S. Geological Survey Open-File Report 91-255, 45 pp.
- Zumberge, J.F., K.J. Hurst, U.J. Lindqwister, F.H. Webb and G. Blewitt (1991) Measurements of the Sierra Madre Earthquake with the Global Positioning System, EOS, Trans., Am. Geoph. Union, v.72, no.44, p.319.

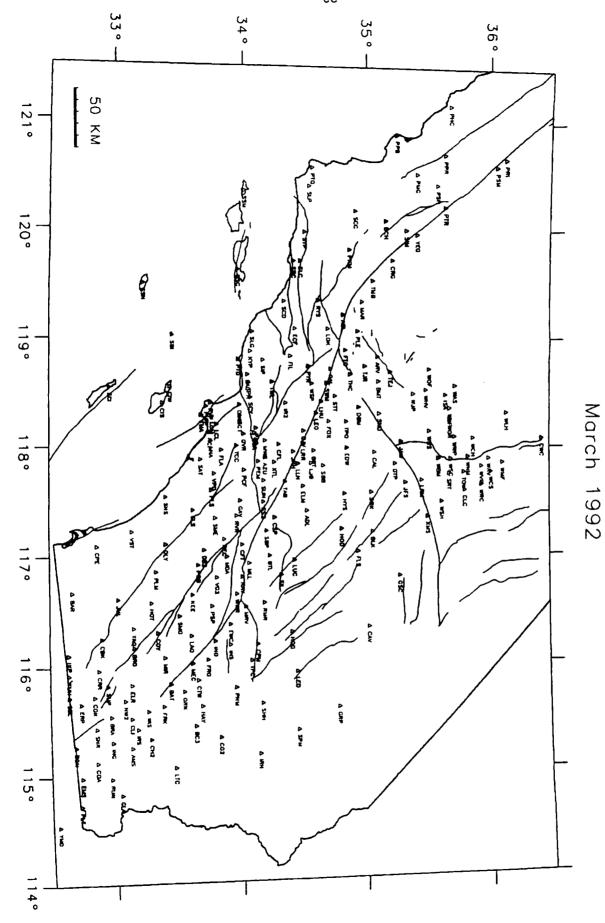


Figure 1. Southern California Scismic Network. Map of all stations operated and maintained by the Pasadena Field Office as well as several stations operated by other agencies that are also digitally recorded.

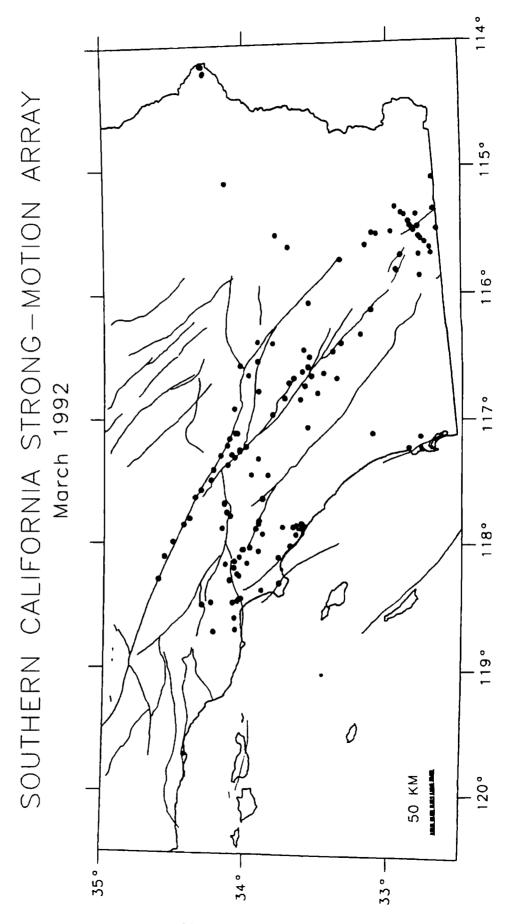


Figure 2. Southern California Strong-Motion Network. Map of all stations operated and maintained by the Pasadena Field Office as well as several stations operated by other agencies.

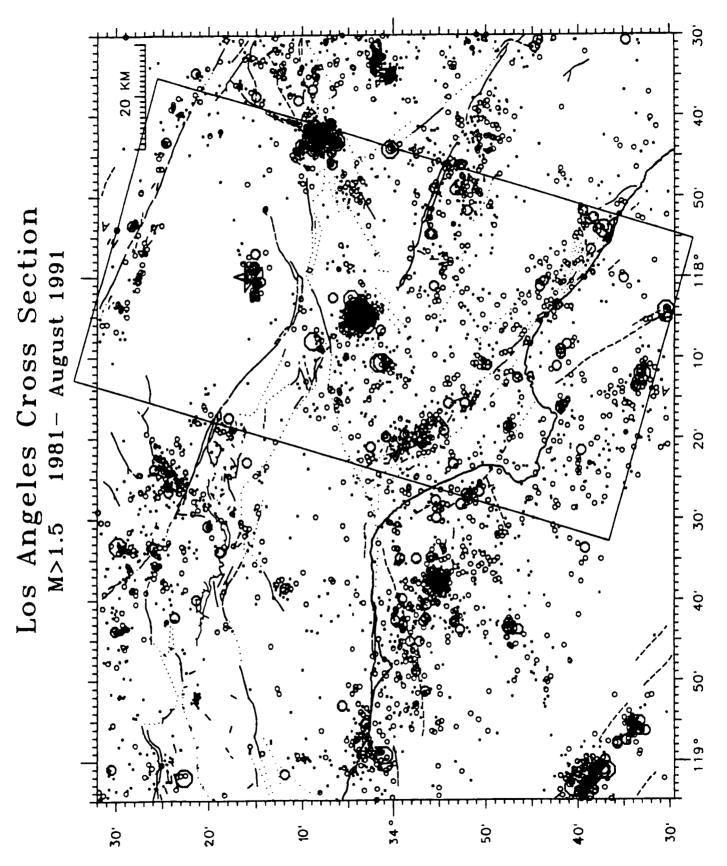


Figure 3. A map of the Los Angeles region showing the region of increased moderate earthquake activity, enclosed by box A-A', and all earthquakes M≥1.5 recorded by the SCSN between 1981 and October 1991. The hatched region is the aftershock zone of the 1971 San Fernando earthquake (M6.6).

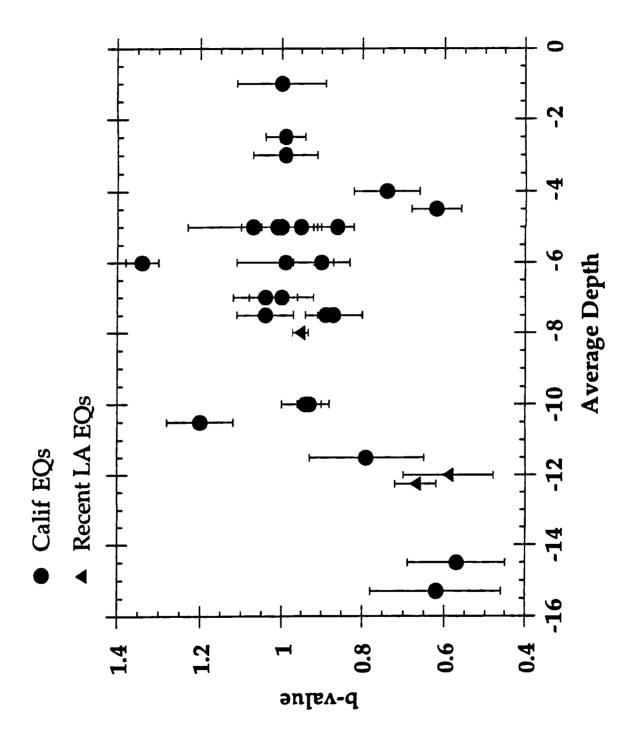


Figure 4. The b-values determined for the aftershock sequences of M≥5.0 Californian mainshocks plotted against the average depth (depth of the shallowest aftershock plus the depth of the deepest aftershock, divided by 2) of the aftershock sequence.

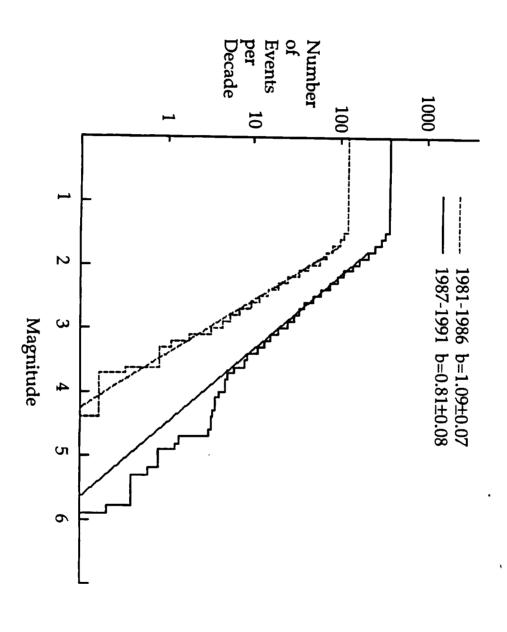
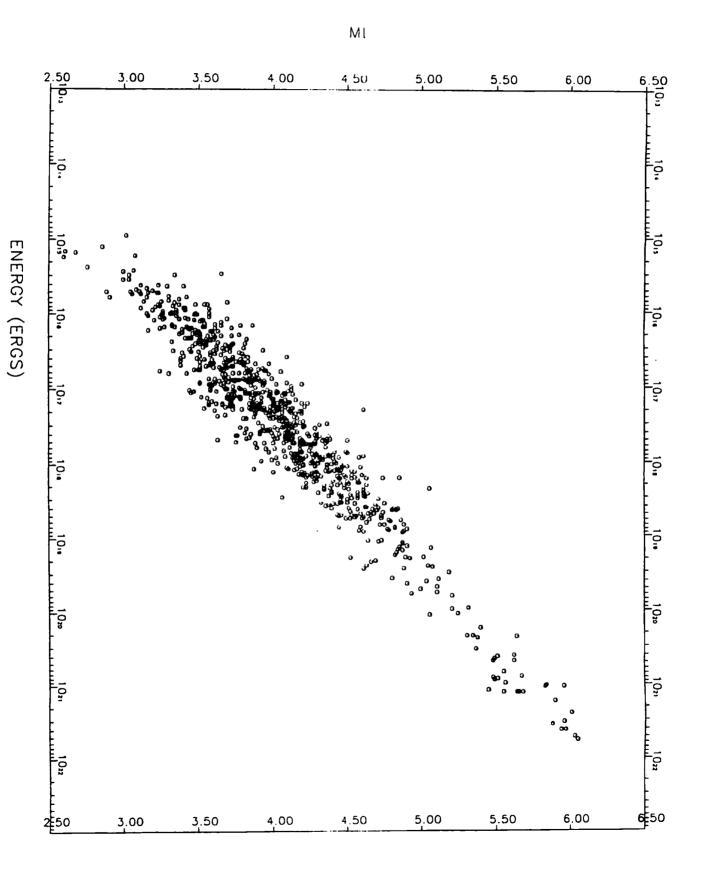


Figure 5. Cumulative number of earthquakes plotted versus magnitude for earthquakes within the box in Figure 1 for 1981 to 1986 (dotted lines) and 1987-1991 (solid lines).





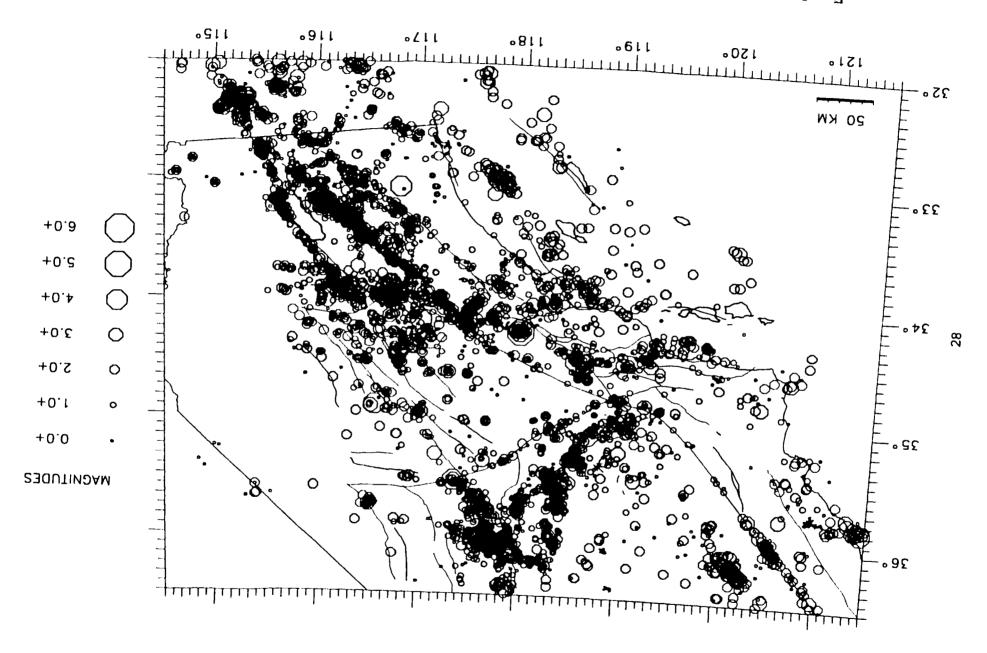
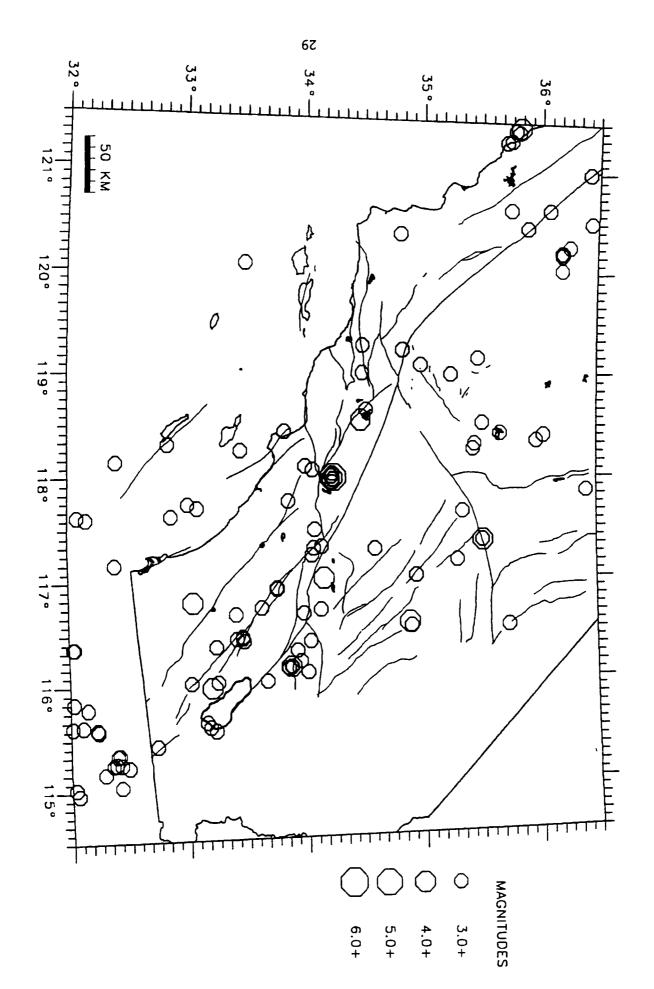



Figure 7. Map of all located earthquakes in southern California for the period of January through December 1991,





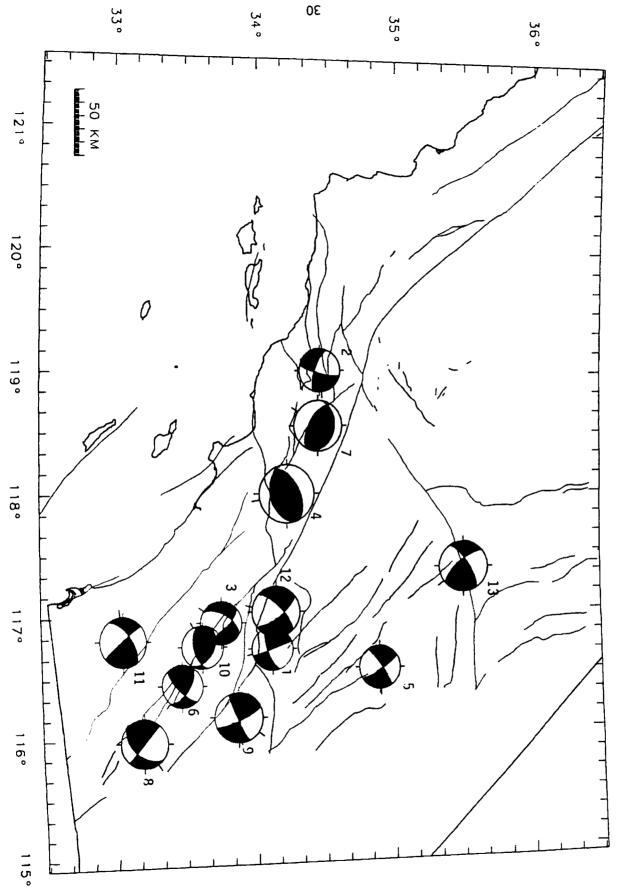


Figure 9. Lower hemisphere focal mechanisms for selected events for the period January through December 1991. Event numbers correspond to numbers in FM column of Appendix A.



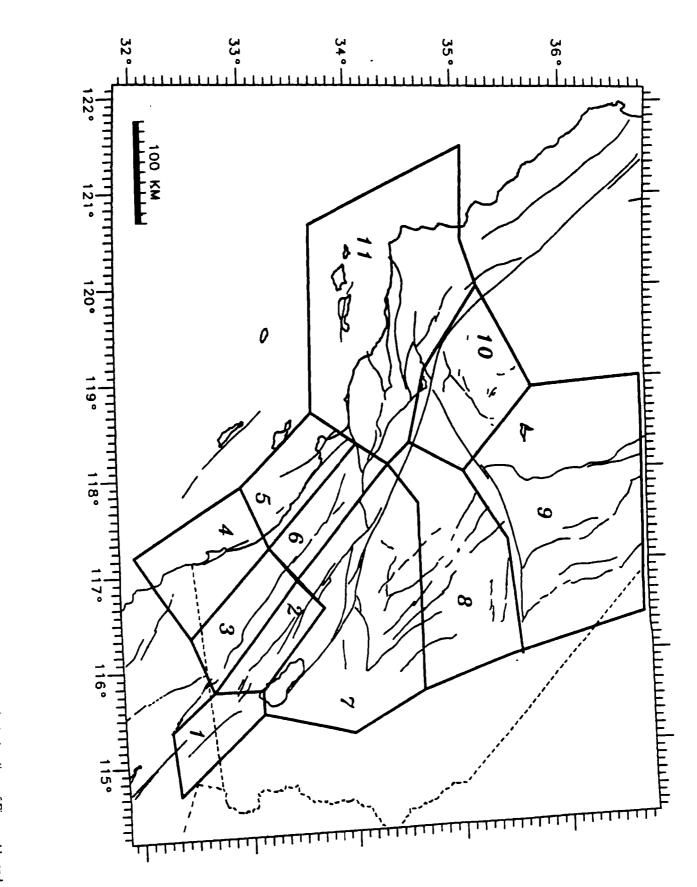


Figure 10. Map of sub-regions used in Figures 11a and 11b. The geographic name of each sub-region, as used in the text, can be found in the headings of Figures 11a and 11b.

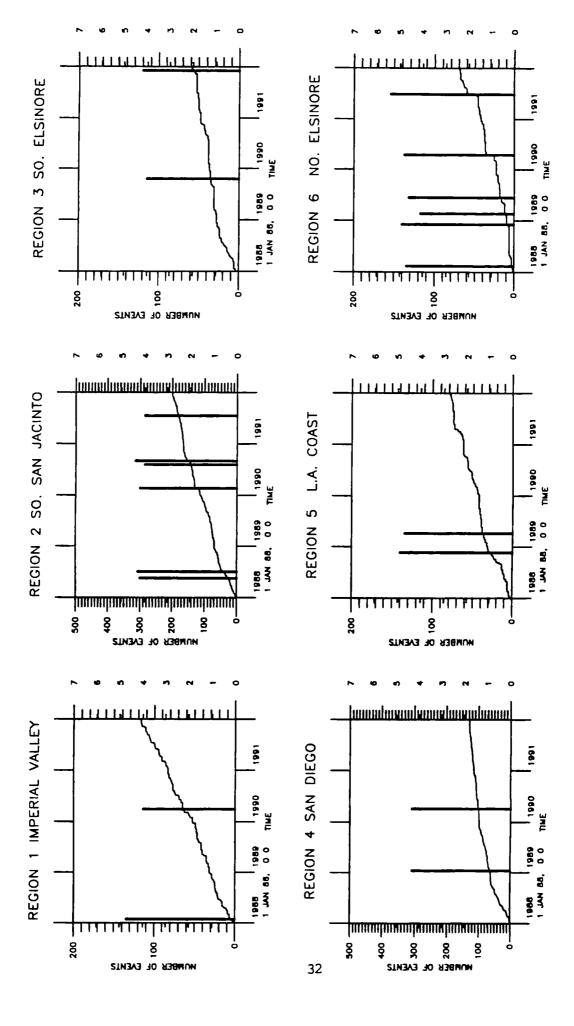

shown in Figure 10. Vertical bars represent time and magnitude (scale on right) of large events (ML 24.0). Note that the vertical scales of the plots may not be the same. Figure 11a. Cumulative number of events (ML > 2.5) in sub-regions 1through 6 over the four year period ending December 1991. The boundaries of the sub-regions are

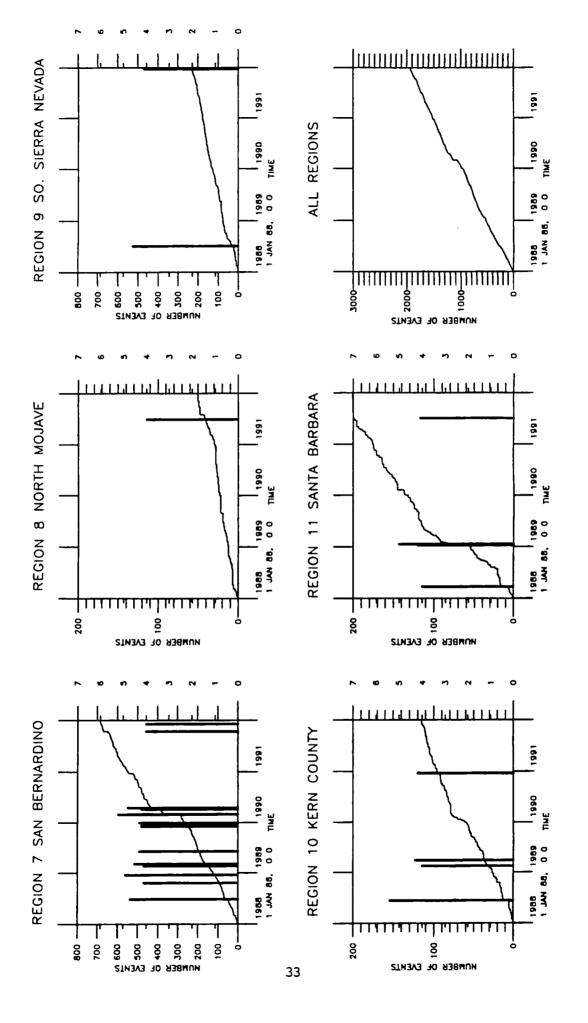

of the sub-regions are shown in Figure 10. Vertical bars represent time and magnitude (scale on right) of large events (ML 24.0). Note that the vertical scales of the plots Figure 11b. Cumulative number of events (ML22.5) in sub-regions 7 through 11 and for all sub-regions over the four year period ending December 1991. The boundaries may not be the same.

DATE 1991 MAY 4 2304	TIME 54.25	LAT 34.5093	LON -119.2842	<b>Z</b> -5.15	Q	M 3.3	TYP M <sub>t</sub>	RMS 0.13	PH 81	CUSPID 2017603	FM
1991 MAY 20 1500		33.7813	-116.9347			3.7	M <sub>L</sub>	0.13	111	695381	3
1991 MAY 20 1504		33.7789	-116.9336			3.5	M <sub>t</sub>	0.13	79	695382	5
1991 MAY 21 1830		33.7839	-116.9282			3.0	M	0.10	39	2018405	
1991 MAY 22 0118	59.09	36.4404	-120.5076	-6.00		3.1	M <sub>CA</sub>	0.18	19	2018438	
1991 MAY 24 1808 1991 MAY 28 1158	33.67 47.69	33.0367 35.7380	-116.0153	-5.93		3.4	$M_L$	0.17	58	2018630	
1991 MAY 28 1219		35.7688	-121.3178 -121.4240	-6.00 -6.00		3.7 3.1	M <sub>L</sub>	0.09 0.24	18 14	2019701 2019705	
1991 MAY 31 1301	41.89	35.7088	-121.4240			3.0	M <sub>CA</sub> M <sub>CA</sub>	0.24	56	2019703	
1991 JUN 11 0729		32.2254	-115.5923	-6.00		3.2	M <sub>L</sub>	0.31	25	2020563	
1991 JUN 13 0355		33.0251	-117.7413			3.4	$M_L$	0.57	67	2020709	
1991 JUN 14 1109		33.1633	-115.6394	-1.00		3.3	$M_{CA}$	0.11	50	2020781	
1991 JUN 16 1146		32.3904	-115.3409	-6.00		3.2	$M_L$	0.29	32	2020887	
1991 JUN 19 1853		36.6142	-121.2221	-6.00		3.1	$M_{CA}$	0.36	21	2021058	
1991 JUN 21 1741	43.08	35.2576	-119.0058	-28.61	Α	3.2	$M_L$	0.24	87	696455	
1991 JUN 28 1443			-117.9995			5.4	$M_L$	0.13	156	2021449	4
1991 JUN 28 1459		34.2531	-118.0390			3.4	$M_L$	0.15	120	2021451	
1991 JUN 28 1537	58.84	34.2530	-117.9778			3.9	_	0.13	135	696662	
1991 JUN 28 1616		33.4280	-116.6847			3.0	$M_L$	0.09	36	2021466	
1991 JUN 28 1658	45.86	34.2555	-117.9851	-9.78	Α	3.4	$M_L$	0.10	137	2021472	
1991 JUN 28 1700	55.56	34.2529	-117.9920	-9.47	Α	4.3	$M_{t}$	0.11	119	2021473	
1991 JUN 28 1852	58.17	34.2486	-118.0145	-11.10	Α	3.2	$M_L$	0.13	76	2021479	
1991 JUN 29 1753	39.65	34.9220	-116.5412	-6.00	С	3.6	$M_{\tilde{L}}$	0.15	55	151520	5
1991 JUN 29 1753	52.05	34.9085	-116.5794	-6.00	C	4.0	$M_L$	0.32	51	2021565	
1991 JUL 5 1741	57.12	34.4970	-118.5555	-10.91	A	4.1	$M_{L}$	0.16	131	2022113	7
1991 JUL 6 2254	38.99	34.2425	-118.0100	-10.32	Α	3.8	$M_L$	0.12	138	2022072	
1991 JUL 9 0906	11.50	33.4915	-116.4242	-7.35	Α	3.7	$M_{L}^{-}$	0.13	139	2022070	6
1991 JUL 11 1531	24.04	33.7795	-116.9255	-13.08	Α	3.2	$M_{L}^{-}$	0.12	91	2022232	
1991 JUL 16 1844	30.90	32.4181	-115.0415	-6.00	С	3.4	$M_L$	0.34	21	2022575	
1991 JUL 17 1612	17.85	33.4815	-116.4494	-9.78	A	3.2	$M_L$	0.14	60	2022683	
1991 JUL 19 0241	36.81		-115.9682	-3.10		4.0	$M_L$	0.15	62	697556	8
1991 JUL 22 2329		33.4989	-120.0776	-6.00		3.1	$M_{CA}$	0.25	12	2023069	
1991 AUG 2 0128	26.73	32.8819	-117.6275	-6.00		3.1	$M_L$	0.36	76	2023828	
1991 AUG 3 0959		34.0934	-117.3122					0.14	115	698180	
1991 AUG 4 1154	11.84	34.9670	-117.0363	-3.65	Α	3.1	$M_L$	0.19	94	152075	
1991 AUG 6 1434	34.61	32.4235	-115.2544					0.28	28	2025169	
1991 AUG 14 2150	25.58	34.2516	-117.9511	-9.80			$M_{L}$	0.09	82	2026766	
1991 AUG 15 1600		37.0000	-116.0500	0.00		4.1	$M_L$	0.32	23	699182	
1991 AUG 24 0748		32.4075	-115.3483			3.0		0.34	35	2027499	
1991 AUG 26 0602	25.71	36.0447	-118.4095	-9.27	Α	3.0	M <sub>CA</sub>	0.08	36	2027609	
1991 AUG 30 1308	37.50	32.8526	-118.3215			3.2		0.13	68	2027964	
1991 SEP 6 2341	5.99	34.8502	-119.2425			3.2		0.16	47	2028593	
1991 SEP 7 0511	51.24	32.0347	-116.3748	-6.00		3.6		0.35	38	750112	
1991 SEP 10 0730		32.4853				3.2		0.33	39	2028814	
1991 SEP 10 0746	59.55	32.4885	-115.2280	-6.00	С	3.0	$M_L$	0.29	36	2028815	

### Appendix A

#### Significant Southern California Earthquakes

All events of  $M_L \ge 3.0$  for the period January to December 1991. Times are GMT, Z is the depth in km, Q is the overall quality of the location, RMS is the root-mean-square of the location error, and PH is the number of phases picked. The CUSPID is the unique number assigned to the event by the CUSP system. FM denotes the number of the accompanying focal mechanism in Figure 10.

DATE	TIN	ИΕ	LAT	LON	Z	Q	M	TYP	RMS	РН	CUSPID	FM
1991 JAN 8	0851	28.63	33.6814	-116.0260	-11.42	Α	3.4	$M_{t}$	0.10	61	2010062	
1991 JAN 9	2209	5.70	35.8923	-120.4535	-8.41	Α	3.1	MCA	0.08	43	2010172	
1991 JAN 10	1854	16.93	35.5294	-118.5288	-10.13	Α	3.1	$M_{CA}$	0.02	8	2010217	
1991 JAN 11	1942	36.31	32.0319	-115.0325	-6.00	D	3.1	$M_L$	0.30	9	2010275	
1991 JAN 16	1415	55.09	32.3789	-115.2644	-6.00	С	3.2	$M_{CA}$	0.33	25	2010438	
1991 JAN 31		5.37	36.0533	-121.6956			3.5	$M_L$	0.39	16	2011299	
1991 JAN 31		18.00	34.8204	-120.3834		С	3.5	$M_L$	0.13	17	2011371	
	1638	32.31	36.1074	-121.8743	-6.00		4.3	$M_{\underline{L}}$	0.56	32	2011726	
	1609	20.63	36.6558	-121.1522			3.7	$M_{L}$	0.48	24	2011790	
1991 FEB 8	1457	10.95	32.2336	-115.5771	-6.00	С	3.3	$M_L$	0.30	20	2012056	
1991 FEB 16		57.91	35.0055	-119.0976			3.1	$M_L$	0.11	50	2012653	
1991 FEB 24		36.89	36.2566	-120.2689	-6.00	C	3.4	$M_L$	0.20	33	2013162	
1991 MAR 3		15.45	36.4176	-121.0023	-6.00	С	3.4	$M_L$	0.21	24	2013615	
1991 MAR 5		29.92		-117.1662	-6.00	С	3.7	$M_L$	0.39	58	2013719	
1991 MAR 7	0443	22.32	34.0854	-118.0745	-13.46	A	3.1	$M_L$	0.16	61	2013812	
1991 MAR 8		35.57	34.1499	-116.7185			3.7	$M_L$	0.11	97	2013964	1
1991 MAR 11		45.45	36.5735	-121.1915	-6.00	D	3.0	$M_{CA}$	0.31	12	2014168	
1991 MAR 15		21.15	33.1060	-117.7051	-6.00	С	3.0	$M_L$	0.29	30	2014380	
1991 MAR 17		49.08	32.1452	-115.7833	-6.00	С	3.4	$M_L$	0.35	42	2014527	
1991 MAR 21	0112	19.56	36.9000	-116.7500	0.00	A	3.1	$M_{CA}$	0.49	8	2014952	
1991 MAR 22		56.34	35.4879	-119.1648	-6.00	С	3.0	$M_{CA}$	0.38	62	2014989	
1991 MAR 22		59.68	36.5887	-121.2122	-6.00	D	3.1	MCA	0.41	11	2015041	
1991 MAR 29		55.85	32.0811	-117.6204	-6.00	С	3.0	$M_L$	0.56	32	2015468	
1991 MAR 31		21.74	32.0134	-115.6133	-6.00		3.5	$M_L$	0.47	39	2015587	
1991 APR 3	1729	46.99	35.4643	-118.3242	-8.91	A	3.5	$M_L$	0.10	104	2015771	
1991 APR 9		20.18	33.4709	-118.2627		В	3.5	$M_L$	0.17	81	2016096	
1991 APR 12		54.93	33.8678	-116.1514	-2.46	Α	3.0	$M_L$	0.17	57	2016334	
1991 APR 12		6.77	34.5085	-119.0154			3.5	$M_{ m L}$	0.14	82	694013	2
1991 APR 14		39.37	33.8661	-116.1502			3.4	$M_{L}$	0.10	67	2016539	
1991 APR 19	1802	6.61	33.1915	-115.5935	-1.23	A	3.1	$M_L$	0.28	48	2016941	
1991 APR 20		13.51	33.8454	-118,4450	-6.09		3.1	$M_L$	0.16	63	694409	
1991 APR 20		12.46	34.5449	-118.6564		Α	3.1	$M_L^-$	0.15	67	2016964	
1991 APR 23		14.40	32.1574	-117.6013	-6.00		3.0	$M_L$	0.52	28	2017101	
1991 APR 29		48.72	32.1038	-115.6188	-6.00	С	3.5	$M_L$	0.48	36	2017313	
1991 MAY 3	1855	26.41	34.0580	-116.4136	-7.16	Α	3.2	$M_{L}$	0.07	61	2017538	

1001 DEC 4 0710	31.18 57.59 3.51 37.75	32.4112 33.0696 34.1777 33.8887	LON -118.1493 -116.8035 -117.0224 -116.1633 -120.6306	-6.00 -14.90 -10.71 -1.86	D A A A	3.3 4.2 4.0 3.2	Mլ Mլ Mլ Mլ	RMS 0.37 0.28 0.21 0.20 0.25	57 158 150 58	2035919 2036037 2036038 2036263 2036436	11
1991 DEC 20 0319 1991 DEC 20 1038 1991 DEC 30 0213	30.00 29.38 0.72	35.5349	-117.3747 -117.3713 -115.4249	-7.89	Α	4.1	$M_{L}$	0.22 0.21 0.25	98	2037397 2037403 2038270	

DATE T	ГМЕ	LAT	LON	z	Q		TYP	RMS	PH	CUSPID	FM
1991 SEP 10 0818	30.87	32.0437	-116.3753	-6.00	С		$M_{ m L}$	0.24	14	2028818	
1991 SEP 14 1754	30.60	34.0233	-118.1122	-9.71		3.3	$M_L$	0.14	80	750392	
1991 SEP 15 1549	44.51	32.0537	-114.9727	-6.00	D	3.4	$M_L$	0.35	17	2029177	
1991 SEP 15 1953	55.35	34.1611	-117.3279	-8.78	Α	3.2	$M_L$	0.12	109	2029203	
1991 SEP 16 1622	57.79	34.6200	-117.3000	0.00	D	3.1	$M_{CA}$	0.13	5	750462	
1991 SEP 17 2110	28.16	35.8104	-121.4516	-6.00	D	4.8	$M_L$	0.26	61	2029412	
1991 SEP 17 2114	2.78	35.7002	-121.3030	-6.00	С	3.0	$M_{CA}$	0.07	13	152611	
1991 SEP 19 1303	54.73	35.7993	-121.4068	-6.00	С	3.1	$M_{CA}$	0.11	16	2029570	
1991 SEP 23 1455	10.17	35.9840	-118.3558	-5.47	С	3.4	$M_{L}$	0.07	47	2029952	
1991 SEP 25 0350	56.77	34.1037	-117.4918	-15.52	A	3.1	$M_L$	0.11	88	750805	
1991 SEP 26 1429	30.53	33.2651	-116.0191	-2.14		3.5	$M_{L}$	0.18	73	2030277	
1991 OCT 2 1842	21.37	33.8786	-117.7699	-8.39		3.4	$M_L$	0.13	67	2030758	
1991 OCT 3 0636	47.10	36.1934	-120.0390	-6.00	С	3.3	$M_{ m L}$	0.38	53	2030804	
1991 OCT 6 0416	38.16	35.4506	-118.2766	-3.15	Α	3.2	$M_L$	0.13	93	2031028	
1991 OCT 12 0541	20.19	33.8958	-116.1621	-4.35	A	3.1	$M_L$	0.09	48	751466	
1991 OCT 12 0833	19.90	32.0276	-115.8415		D	3.7	M <sub>CA</sub>	0.79	25	2031493	
1991 OCT 12 1150	53.14	33.8966	-116.1612	-4.17		3.5	$M_L$	0.10	68	751493	
1991 OCT 12 1439	28.37	33.9443	-116.3235			3.5	MD	2.09	87	2031528	_
1991 OCT 12 1439	32.10	33.8902	-116.1637				$M_L$	0.25	70	751510	9
1991 OCT 12 1444	42.19	33.9717	-116.2179	-50.00	Α	3.5	M <sub>CA</sub>	1.59	78	2031529	
1991 OCT 12 1444	46.70	33.8902	-116.1650	-4.00	Α	3.6	$M_{l}$	0.10	67	751511	
1991 OCT 12 1445	25.08	33.8914	-116.1651	-3.00		3.6	M	0.12	13	154356	
1991 OCT 12 1457	49.94	33.8946	-116.1616	-3.80		3.1	MCA	0.09	58	751514	
1991 OCT 12 1458	49.96	33.8919	-116.1604	-2.93		3.3	M <sub>L</sub>	0.18	46	2031531	
1991 OCT 12 1500	44.78	34.0319	-116.1037			3.0	M <sub>CA</sub>	1.82	28	2031532	
1991 OCT 12 1521	35.15	33.8936	-116.1605	-3.78	Α	3.3	M <sub>L</sub>	0.13	61	2031534	
1991 OCT 17 0309	42.18	33.2364	-115.5583	-1.00			MCA	0.08	5	2031894	
1991 OCT 23 1253	5.25	33.4293	-116.4446			3.7	M <sub>CA</sub>	0.17	9	2032425	
1991 OCT 25 1419	55.60	35.3608	-117.6586		A	3.3	MCA	0.04	20	2032667	
1991 OCT 27 2054	5.78	33.6466	-116.7453			3.8	ML	0.23	118	2032895	10
1991 OCT 29 0327	4.45	34.0781	-117.2473	-13.06	Α	3.4	Mi	0.21	127	2032999	
1991 OCT 30 1827	40.17	33.2556	-116.3700			3.2	MCA	0.04	11	2033098	
1991 NOV 1 1404	35.33	32.2815	-115.1701	-6.00	С	3.3	$M_{L}$	0.64	23	2033295	
1991 NOV 1 1528	34.80		-116.5304				ML	0.27	41		
1991 NOV 4 0644	30.40		-116.6851	-9.04				0.16	76		
1991 NOV 8 0300	49.16	36.0806	-120.6337	-4.54	Α	3.2	M <sub>r</sub>	0.27	38	2033968	
1991 NOV 8 2308	13.73		-115.2538	-6.00				0.63		2034077	
1991 NOV 11 0453	27.02	35.6801	-118.4270	-4.15				0.22		2034274	
1991 NOV 13 1356	26.02	36.4135						0.25		2034399	
1991 NOV 20 0955	8.79	36.2005	-120.2063	-6.00				0.30	50	2034972	
1991 NOV 20 1006	45.50	36.1924	-120.2048	-6.00	С	3.5	Mi	0.33	45	2034973	
1991 NOV 20 1009	17.50		-120.2108					0.26		2034974	
1991 NOV 20 1012	26.46		-120.1865					0.44		2034975	
1991 NOV 26 1744	47.06		-116.4649					0.23	72		
1991 NOV 30 0645	58.07		-116.1872	-6.00				0.26	15		
			<b></b>	2.00	_	-••	٠.٦				

*Bonds Corner	. STA.# 5054 SMA-820 RFT-156 RFT-1	
*Borrego SpringsScripps Clinic, Ground Site	.STA.# 5220 SMA-1473	33.210N 116.330
*Brawley		32,991N 115.512
Brea DamCrestLeft AbutmentDownstream	.STA.# 951 SMA-386 SMA-385 SMA-387	33.889N 117.926
*Cabazon	SMA-1495	33.918N 116.782
*CalexicoFire Station	.STA.# 5053 SMA-1484	32.669 115.492
*CalipatriaFire Station, Ground Site	.STA.# 5061 SMA-1530	33.13 115.52
Carbon Canyon DamCrestRight AbutmentLeft Abutment	STA.# 108 SMA-383 SMA-384 SMA-382	33.916 117.842
*Collins ValleyGround Station	STA.# 5046 SMA-1531	33.405 116.467
*Copper Basin Dam	STA.# 819 SMA-1047 SMA-6700	
Costa Mesa	STA.# 5286 SMA-354	33.658 117.931
Costa Mesa	.STA.# 5287 SMA-2017	33.677 117.869
Diemer Filteration Plant	.STA.# 698 SMA-1044 SMA-1045	33.913 117.819
*El Centro Array #1-Borchard Ranch Ground Site	STA.# 5056 SMA-1457	32.960 115.319
#2-Feed Mill Ground Station	STA.# 5115 SMA-587	32.916 115.366
#3-Pine Union School Ground Site	STA.# 5057 SMA-1529	32.894 115.380
#4-Schafter 2905 Anderson Road, Ground Station	STA.# 955 SMA-1427	32.864 115.432
#5-Gilbert 2801 James Road, Ground Station	STA.# 952 SMA-2339	32.855 115.466
#6-Pitchie		

#### Appendix B

#### Strong-Motion Accelerograph Stations in Southern California

The following stations are operated by the Branch of Engineering Seismology and maintained by the technicians now stationed in the Pasadena office (see the article entitled Strong-Motion Instrumentation Program in Southern California under the Network Operations section). Figure 2 shows a map of the stations.

\* station is maintained by personnel other than those in the Pasadena Office

Alhambra	.STA.# 482	34.085 118.149
900 South Fremont Structural Array	CRA-316	
Anza Array	STA.# 5160 SMA-1524	33.555 116.661
	STA.# 5241 SMA-1642	33.512 116.798
	STA.# 5221 SMA-2030	33.38 116.68
	STA.# 5157 SMA-1461	33.738 116.838
	STA.#5242 SMA-1992	33.616 116.627
	STA.# 5043 SMA-1474	33.676. 116.680
	STA.# 5232 SMA-359	33.707 116.716
Pine Meadows RanchMountain Center, Ground Site	STA.# 5223 SMA-1991	33.578 116.589
Pinyon Flat Observatory Underground Vault	STA.# 5044 SMA-1493	33.607 116.453
Rarick SpringsGround Station	STA.# 5230 SMA-1893	33.568 116.510
	STA.# 5224 SMA-2029	33.630 116.847
Anza Array (continued)San JacintoMWD West Portal Tunnel	STA.# 5284	33.821 116.967
	SMA-1467	
Tripp Flats36401 Tripp Flats RoadGround Site	STA.# 5222 SMA-2031 SSA-292	33.60 116.74
Tule Canyon Ground Station	STA.# 5231 SMA-1895	33.47 116.64
*Bombay BeachFire Station, Ground Site	.STA.# 5271 SMA-5303	33.353 115.732

Irvine	.STA.# 5281 CRA-318	33.656 117.859
Basement	SMA-4223	
Jensen Filteration Plant	STA.# 655 SMA-259 SMA-6757 SMA-6756	34.312 118.496
Lake Mathews Dam	.STA.# 5163 SMA-1050	33.852 117.451
*Leona ValleyFire Station, Ground Site	.STA.#5029 SMA-1499	34.62 118.29
*Littlerock	.STA.#5030 SMA-1521	34.52 117.99
Live Oak Reservoir	.STA.# 656	
Live Oak Reservoir	CRA-225 SMA-258	
*Loma Linda	.STA.#129 SMA-813	34.05 117.26
*Loma Linda		
Structural Array 34.050 117.249Ground Station, North	CRA-230 SMA-4233	
Ground Station, South	SMA-4234	
*Lone Pine Canyon		
Long BeachV.A. Hospital	.STA.# 5106	33.778 118.118
Basement	SMA-845	
6th Floor1lth Floor	SMA-809 SMA-749	
Ground Site (USGS)	SMA-1731	
Los Angeles (Bell)	.STA.# 5129	33.996 118.162
	SMA-1295	
Los Angeles (Brentwood)	.STA.# 638	34.063 118.463
V.A. Hospital Building #259, Ground Site	SMA-750	
Los Angeles	.STA.# 141	34.118 118.299
Griffith Observatory, Basement	SMA-3822	
Los Angeles (ACOSTA RES.)	.STA.# 5291 SMA-1418	34.088 118.201
Los Angeles	.STA.# 5284	34.040 118.445
Ground	SMA-3914	
First LevelThird Level	SMA-2019 SMA-929	
	CTA # 637	24 240 119 479
Los Angeles (Sepulveda)	SMA-751	34.249 118.478
Los Angeles	.STA.# 757	34.097 118.478
Sepulveda Canyon	SMA-1054	

#7-Imperial Valley College Shop Building, Ground Site	STA.# 5028 SMA-1526	32.829 115.504
#9-Imperial Vly Irr. Dist. 302 Commercial, Ground Site	STA.# 5115 SMA-1459	32.794 115.549
#10-Hospital Ground Site	STA.# 412 SMA-3932	32.780 115.567
#11-McCabe School 701 McCabe, Ground Site	STA.# 1504 SMA-1504	32.752 115.594
#12-Meloland Cattle Co. 907 Brockman Road, Ground Station	STA.# 931 SMA-1503	32.718 115.637
#13-Strobel Residence, Ground Site	STA.# 5059 SMA-1460	32.709 115.683
*El Centro Differential Array	STA.# 5165 SMA-826	33.796 115.535
*El Centro	.STA.# 464 SMA-588	32.800 115.473
*Ei Centro	.STA.# 5272 SMA-499	32.708N 115.092
Escondido Power Station	.STA.# 5109	33.125 117.117
	RFT-209	
*Forest Falls	.STA.# 5075 SMA-1510	34.088 116.919
•		33.925 116.389
Garvey Reservoir	.STA.# 709	
Garvey Reservoir		
*Gene Pumping Plant	.STA.# 818 SMA-1049	34.290 114.171
*Gene Wash DamCrest	.STA.# 5276 SMA-6701	34.300 114.166
Hawthorne	.STA.# 5243 SMA-360	33.896 118.377
*Hinds Pumping Plant	.STA.# 817 SMA-1057	33.71 115.63
*Holtville	.STA.# 5055 SMA-1482	32.812 115.377
Huntington Beach	. STA.#5288	33.697 118.023
Ground Site	SMA-1128	
*Imperial Wildlife RefugeLiquefaction Array, Ground Station	.STA.# 5201 CRA-265	33.097 115.530
*Iron Mountain Pumping Plant	STA.# 820 SMA-1058	34.148 115.122

*Ocotillo WellsBurro Bend Cafe, Ground Site	.STA.#5050 SMA-1486	33.14	116.13
Olive Del RanchGround Site	.STA.# 5037 SMA-1514	34.004	117.223
Orange County Reservoir	.STA.# 697 SMA-6696 SMA-1046		
*PalmdaleFire Station, Ground Site	.STA.#262 SMA-1458	34.58	118.11
Palos Verdes Reservoir	.STA.# 710 SMA-1056 SMA-6699		
*Parachute Test Site	.STA.#5051	32.929	115.700
*Parachute Test Site	.STA.#5247 SMA-1470	32.926	115.695
*Paradise Springs CampKitchen, Ground Site	.STA.#5032 SMA-1469	34.40	117.80
Pasadena	.STA.# 5180 SMA-553 SSA-291	34.149	118.172
*Plaster CityStorehouse, Ground Site	STA.# 5052 SMA-1497	32.79	115.86
Prado         Dam         33.890         117.641            Downstream         33.888         117.640            Left Abutment         33.890         117.637	STA.# 969 SMA-389 SMA-381 SMA-388		
*Rancho De AnzaGround Site Vault	STA.# 5047 SMA-1522	33.348	116.400
Riverside	CRA-310 SMA-267	33.968	117.447
*Salton Sea	SMA-1471 SSA-485	33.178	115.615
San Antonio Dam       34.157       117.676	SMA-476		
	SMA-4/5		
*San Bernardino Array	SMA-475 STA.#5265 SMA-3560	34.235	117.407
Devore Water Co.	STA.#5265		117.407 117.158
Devore Water Co. Ground Site East Valley Water District	STA.#5265 SMA-3560 STA.#5266	34.122	

Los Angeles	STA.# 872	34.067 118.248
1111 Sunset Blvd.		
Roof 4th Floor	SMA-1076 SMA-1075	
Basement	SMA-1074	
Los Angeles (Wadsworth)	STA.# 5082	34.053 118.452 *
V.A. HospitalStructure Array*	CRA-233	
Ground Site-North (USGS)	SMA-4980	
Ground Site-South (USGS)	SMA-4979	
The America	CT 4 # 5000	24.052 110.062
Los Angeles	S I A.# 3233	34.052 118.263
Structural Array	CRA-270	
Basement, North-West	SMA-6063	
Basement, North-East	SMA-6064	
Basement, South-East	SMA-6065	
*Lytle Creek	CTA #5202	34.251 117.490
Ground Site	SMA-1488	34.231 117,490
Malibu Canyon	STA.# 5080	34.078 118.693
	SMA-1453	
*Mecca	STA #5270	33.572N 116.076
	SMA-5302	33.372N 110.070
·		
*Mentone	.STA.#5162	34.067 117.117
Fire Station, Ground Site	SMA-1517	
Mills Filter Plant	CT 4 # 5375	22.020.117.220
Ground Site	.SIA.# 32/3 SMA-6695	33.920 117.320
Growie Site	3WLA-0073	
*Morongo Valley	.STA.#5071	34.048 116.577
	SMA-1483	
Morris Dam	CTA # 756	24 172 117 070
Left Abutment	.SIA.# /30 SMA-1051	34.173 117.879
Newport Beach	.STA.# 5285	33.600 117.866
	SMA-981	
Newport Beach	STA # 5346	22 610 117 070
840 Newport Center Drive	. S 1 A.# 3240	33.618 117.878
Structural Array	CRA-231	
•		
*North Palm Springs		33.924 116.543
Post Office, Ground Site	SMA-1456	
Norwalk	STA # 634	33.917 118.067
12400 Imperial Hwy	.317.110.74	33.717 110.007
12400 Imperial HwyRoof	SMA-418	
Basement	SMA-424	
4th Floor	SMA-425	
Ground Site, North	SMA-419	
Ground Site, South	SMA-823	
Norwalk	.STA.# 5239	33.917 118.066 *
Building #43		
Structure Array*	CRA-127	
Structure Array*	CRA-128	
Basement (West)*Ground Site, North	SMA-2218 SMA-824	
Ground Site, North	SMA-922	
Order one, and		

Whittier	CT 4 " 004	
7215 Bright Ave	51A.# 804	33.977 118.036
Basement Sth Level 10th Level	SMA-1069 SMA-1070 SMA-1071	
Whittier Narrows Dam	.STA.# 289 SMA-376 SMA-478	
White Water Trout Farm		33.989 116.655
Wrightwood Post OfficeGround	.STA.# 5282 SMA-2894	34.360 117.629

	STA.#5076 SMA-116	34.080 117.114
Rialto Fire StationGround Site	STA.#5268 SMA-1082	34.134 117.368
San Bernardino Cty. Serv. Bldg.  385 North Arrowhead Avenue  Structural Array  Building Ground Floor  Ground Station, East	STA.#5245 CRA-302 SMA-1462 SMA-4904	34.106 117.287
San Bernardino Vly CollegeGround Station	STA.#5269 SMA-1080	34.086 117.309
San Diego	STA.# 5116 RFT-206	32.788 117.138
San Diego	STA.# 5105	32.870 117.230
V.A. HospitalStructural ArrayBasement	CRA-305 SMA-603	
San Joaquin Reservoir	STA.# 5257	
Left Abutment 33.620 117,844	SMA-4222	
Santa Ana	STA.# 281 SMA-3559	33.751 117.870
Santa Barbara	STA.# 283	34,423 119,700
Court House, Basement	SMA-415	
Santa Susana	STA # 5109	
ETEC, DOE	J 1 A.W J 100	
Ground 34.231 118.713	SMA-1280	
BLDG.026 34.232 118.710	SMA-1278	
	SMA-1279	
	SMA-1277	
	SMA-1276	
	SMA-1275	
*Seeley	STA.# 5273	32.795 115.691
Elementary School		
	SMA-393	
Skinner Dam	STA # 720	33.580 117.070
Structure Array	CRA-232	33.300 117.070
Control Building	SMA-1048	
*Consectition Mountain	CTA # 206	
*Superstition Mountain	SIA.# 280	
	SMA-1470	
*Thousand Palms	STA.# 5068 SMA-5304	33.82 116.40
TopangaFire Station, Ground Site	STA.# 5081 SMA-1520	34.084 118.599
*ValyermoForest Station, Ground Site	STA.# 5031 SMA-1512	34.44 117.85
Weymouth Filteration Plant	STA # 5164	34.115 117.779
Chemical Building	SMA-1053	31113 111117
East Water Tank	SMA-1052	

Z scenario 86b-16 CUSPID-86b-15 CVGRM-91-9 GETSEIS-91-9 GOPHER-89-6, 90-12, 91-10 Data (see Seismograms) availability 85a-8,25, 85b-5, 90-9,12 Historical Magnitudes 91-13 formats • 85a-10, 85b-5, 86b-11 ARKIVE tapes • 86b-15,18 ASCII+86b-15,18 FREEZE tapes · 86b-15,18 HYPO71-86b-18 loss due to earthquakes • 87a-8 meaning of phase descriptions • 87a-7 Instrument response (see Seismometers).88-6, phase 85b-6, 90-9 SCEC-91-8 Instrumentation-see Seismometers Data processing. history 85a-5 programs • 88-11, 89-6 status • 85b-11, 86b-10, 87a-7 Discriminators 85a-12, 86a-9 description • 86a - 9, 17, 87b - 4 gain-86a-9 Long-period phase, anomalous 87b-9 J101-85b-8,12, 86a-9 J110.86a-9, 87a-3 J120.87a-3 parameters • 87a-3 Magnitude · calibration•86b-8, 90-6, App.C,D,E,F completeness of catalog-86b-10 historical •91-13 Electronic Communication • methods • 86b-4 e-mail addresses-89-5, App. C MCA\*86b-8, 90-7 GOPHER files 90-12 Mn.86b-8 Internet-89-5 M<sub>H</sub>•86b-9, 90-9 Energy Estimates, radiated 91-13 M<sub>I</sub> •86b-4, 88-11, 90-8 .MEM files • 91-7 Microwave-see Telemetry FBA (Force Balance Accelerometer). stations•87a-1, 87b-1,3, 88-2, 89-2 calibration 87b-5, 88-7 Network• First motion•87a-8 configuration data base 86a-2, 87a-6, App.D. reversals 85a-11.27

u

configuration data base•86a-2, 87a-6, App.D 88-9, App.B distribution map•85a-Fig.1 history•85a-4 new stations•87a-1, 91-2 station list•85a-17 survivability•87a-8

### Appendix C

#### Cumulative Index to Southern California Network Bulletins

Entries for all nine Bulletins published thus far (1985-1991) are included in this cumulative index. Each entry is listed by Bulletin and page number. Bulletins are designated by year and letter as follows:

Code	Date	Open-File	No.
85a	January-June 1985	86-96	
85b	July-December 1985	86-337	
86a	January-June 1986	86-590	
86b	July-December 1986	87-488	
87a	January-June 1987	88-409	
87b	July-December 1987	89-323	
88	January-December 1988	90-499	
89	January-December 1989	90-483	
90	January-December 1990	91-255	
91	January-December 1991	92-xxx	

A
Anomalous seismicity•91-12
В
Backlogs•85b-4, 86a-1, 86b-3
Broad-band station(s).
calibration•88-8, 91-1
description•86a-11, 90-2 PAS•87b-3
programs for data processing 88-11

 $\overline{\mathbf{C}}$ 

Calibration Pulses-85b-8, 86a-11, 87a-4, 87b-4, 88-6
Catalogcompleteness-85a-11, 86b-10
events per year-87a-1, App.A, 87b-Fig.8a,b, 88-25, 89-15
history-85a-5, 87b-7
homogeneity-86b-4,9, 87b-7
magnitude level of completeness-86b-10

```
status-86b-9, 87b-6, 88-10, 89-4, 90-6, 91-8
SCEC data center 91-8
CEDAR (Caltech Earthquake Detection and
   Recording) • 86b-12, 87b-7
Communication-see Electronic Communication
Completeness of catalog-85a-11, 86b-10
Computer(s).
   early use 85a-5
   changes • 85b-3, 87b-6, 91-7
   off-line system•86b-14
   on-line system 86a-2, 87b-6
CUBE-91-10
CUSP (Caltech - USGS Seismic Processing)
   history-85a-5
   magnitudes (see Magnitude) 86b-6,8
   off-line system 86b-14
   on-line system 86a-2
CUSP programs.
   DEMULT-86a-6, 86b-17
   HARVST-86a-6, 86b-16
   EVT subroutines · 86b-15
   EXPORT-86b-15
   FLING-86a-6, 86b-12,16
   GNOME-86b-17
   LOCAL·86b-17
   Q scenario 86b-16
   QED-86b-13,15
   RDFRZ-86b-18
    SCARAB-86a-4
    SLING-86a-5
    SPIDER-86a-4
    TROUT-86b-17
```

WINNOW-86b-18

Ξ	
	_

P-picking•85a-6 automated (GNOME)•86a-7, 86b-17 meaning of phase descriptions•87a-7 PAS (Pasadena) instruments•85a-24 Phase data (see Data)•85b-6, 90-9 meaning of phase descriptions•87a-7 Photographic stations•91-5 Polarity reversals•85a-11,27

# Q

Quality of catalog earthquakes • 86b-3

# R

Real-time processing •87b-7, 89-6, 90-10
References to network data (list of papers) •87a-App.B
Richter scale •91-13

# S

Seismicity. 10-year seismicity 90-15 Anomalous 91-12 Bakersfield 85a-15 Baja California 87a-10 Brawley seismic zone 87a-10 Cerro Prieto 86b-21, 87a-10 Desert Hot Springs-85a-13 Elsinore 86a-14, 87b-13, 88-13, 15, 89-8, 90-14, 91-18 Fontana-87a-11 Gulf of California earthquake 87b-9 Imperial Valley•86a-13, 86b-21, 87a-10, 88-12, 89-7, 90-13, 91-18 Indian Wells Valley•85b-9 Indio Hills 87a-11 Kern County-88-16, 90-15 List of M3.0's 85a-30, 85b-13, 86a-23, 86b-24 Los Angeles-86a-14, 87a-11, 87b-14, 88-14, 89-8, 90-13, 91-12,18

Mojave Desert-85b-8, 90-14, 91-19

Newport-Inglewood fault zone-87a-11 North Palm Springs-86a-7,19, 87a-9 Oceanside • 86a - 8, 86b - 20, 87a - 9 Redlands • 85b-9 Salton Sea-85b-8 San Andreas fault-85b-9, 86a-13, 86b-19 San Bernardino 86a-13, 86b-21, 88-15, 89-8, 90-14, 91-18 San Diego 85a-14, 86b-20, 87b-14, 88-14, 89-8, 90-13, 91-18 San Gabriel Valley-91-12 San Jacinto 88-13, 89-7, 90-13, 91-18 Santa Barbara 85a-14, 86a-14, 86b-22, 87b-14, 88-16, 89-9, 90-15, 91-19 Sierra Madre earthquake•91-12 Sierra Nevada 86a 15, 87b 14, 88 16, 89 9, 90-15, 91-19 Superstition Hills earthquake 87a-9, 87b-12 Upland earthquake • 90-11 Ventura · 85a - 15 Whittier Narrows earthquake-87a-1,9, 87b-10 Seismograms. analog 85a-9, 85b-5 digital-85b-6, 86b-18, 91-8,9 digitization rate 86a-8 synthetic Wood-Anderson-88-10 Seismometers• 100x torsions 86b-7 Benioff • 85a - 24, 86b - 6 broad-band-86a-11, 87b-3, 88-8,10,26, 91-1 Caltech sites 85a-7,23 FBA (Force Balance Accelerometer)-87a-1, 87b-1,3,5 gain•86a-9, 88-5 instrument response 88-6 L4C+85a-7, 87a-1 PAS (Pasadena) 85a-24 portable 89-4 strong-motion•91-9 Wood-Anderson-85a-7,23, 86b-4 Southern California Earthquake Center 91-8 SPIGOT-87b-9, 91-8 Station(s). broad-band-see Broad-band stations configuration data base 86a-2, 87a-6, App.D delays • 87b - 8 discontinued 87b-4, 88-5, 89-4, 90-2, 91-4 FBA-see FBA list-85a-17 magnitude corrections 86b-5 mislocation 87b-4 naming convention 86b-2 new-87a-1, 87b-1, 88-1, 89-1, 90-1, 91-2 noise•87a-5 photographic • 91-5 spacing•85a-6 survivability•87a-8

Survivability of the network 87a-8

# T

Telemetry•85a-8, 87a-9 components•86a-17 microwave•85a-12, 85b-7, 86a-11 noise•87a-5 survivability•87a-8 TERRAscope•91-10, 12 TIMIT•91-8

#### V

VCO (Voltage Controlled Oscillator) •85a-7, 85b-7, 87a-1,3 new(J502) •85b-7, 86a-10, 88-8



Weekly earthquake reports 90-10 Whittier Narrows 87a-1,9, 87b-10 Wood-Anderson 91-14